

**CEAT**

**THE ADVANTAGE THAT  
FARMING DESERVES.**



**CEAT**  
SPECIALTY  
HARD WORKING TYRES





# COMPANY PROFILE

CEAT was established in 1924 in Turin, Italy. Today, we are one of India's leading tyre manufacturers. The brand came to India in 1958, and later became part of the RPG Group. RPG is among the top business houses in India, with a group turnover of 3 billion USD.

CEAT Limited has been conferred the prestigious Deming Prize. The Deming Prize, founded in Japan, is one of the oldest and most prestigious quality awards in the world. With this recognition, CEAT became the first tyre company in the world, outside of Japan, to have the honour of receiving this award. The Deming Prize recognises companies that achieve business transformation by implementing Total Quality Management (TQM).

CEAT Specialty is CEAT's specialized subsidiary for off highway (OTR and Agri) tyres in domestic and international markets, with a brand new plant focused on Agri-radials.

**Manufacturing facilities:** Directly employing 5,000+ people across 7 plants in India and Sri Lanka, CEAT has a wide range of tyres for all user segments. Its range comprises tyres for commercial segments like trucks, buses, light commercial vehicles as well as passenger cars, SUVs and two & three wheeler tyres.

In the Specialty segment, CEAT manufactures farm, mining & earthmover, industrial & construction equipment tyres and special application off road tyres.

**Technology:** Major commitment to research and development enables CEAT to remain at the technical forefront of the tyre industry. The company is also equipped with state-of-the-art research, design and in-house testing facilities, which has helped the company in developing tyres of the highest quality. With decades of expertise, today CEAT is capable of facing the challenging needs of customers around the world.

**Market:** CEAT has been exporting tyres since 1964, which has helped it in getting a firm foothold in the global market. Today CEAT tyres are put in to service in more than 115 countries across the world. CEAT enjoys a major market share in India where tyres are exposed to extreme operating conditions. In India, CEAT is one of the largest suppliers to OEMs in all major categories.

## GREENFIELD PLANT

Our new greenfield plant has a robust manufacturing capacity. Catering primarily to a global Agri radial & OTR market, the plant is spread across a 50-acre plot. High-end equipment with a strong and experienced project team are the hallmarks of this plant. This new plant has automated machinery and is run by Self-Managed Teams.





CATEGORY INDEX			
APPLICATION	RADIAL/BIAS	PATTERN NAME	PAGE NO.
TRACTOR	RADIAL	FARMAX R85	14-22
		FARMAX R80	23
		FARMAX R70	24-29
		FARMAX R65	30-35
		FARMAX RC	36-38
	BIAS	FARMAX R1	40-42
		FARMAX F2M	43-44
FLOTATION	RADIAL	FLOATMAX FT	46-47
	BIAS	FLOTATION T422	48-49
		T422 VALUE PRO	50-51
		TR800	52
		FLOTATION PLUS	53
		FLOTATION TX440	54
IRROGATOR	BIAS	IRROGATOR	56
AGRO-INDUSTRIAL/ MULTIUSE	BIAS	LIFT PRO	58-59
		MPT 602	60
		MPT 800	61
TYRE CARE AND USAGE MANUAL			
GENERAL INFORMATION			64
TYRE DESCRIPTION AND NOMENCLATURE			65-67
LOAD INDEX AND SPEED SYMBOL			68
RMA CODE			69
CONVERSION TABLE			70
TYRE CARE AND MAINTENANCE GUIDELINES			71-78
SKU CODE INDEX			79-83

Disclaimer:

- All tyres conform to TRA & ETRTO standards.
- Images are for representative purposes only.
- Technical specifications are subject to change without prior notice.  
Claim available on CEAT Assist app.



# RADIAL PATTERN INDEX

Rim Diameter	Tyre Size	Pattern	Page No.
20	260/70 R 20	FARMAX R70	24
	280/85 R 20	FARMAX R85	15
	280/70 R 20	FARMAX R70	24
	300/70 R 20	FARMAX R70	24
	320/85 R 20	FARMAX R85	15
	320/70 R 20	FARMAX R70	24-25
	360/70 R 20	FARMAX R70	25
	380/70 R 20	FARMAX R70	25
24	250/85 R 24	FARMAX R85	15
	280/85 R 24	FARMAX R85	15
	320/85 R 24	FARMAX R85	15-16
	320/70 R 24	FARMAX R70	26
	340/85 R 24	FARMAX R85	16
	360/70 R 24	FARMAX R70	26
	380/85 R 24	FARMAX R85	16
	380/70 R 24	FARMAX R70	26
	420/85 R 24	FARMAX R85	16
	420/70 R 24	FARMAX R70	26
	440/65 R 24	FARMAX R65	31
	480/70 R 24	FARMAX R70	26
	480/65 R 24	FARMAX R65	31
	540/65 R 24	FARMAX R65	31
26.5	600/55 R 26.5	FLOATMAX FT	47
28	280/85 R 28	FARMAX R85	16
	320/85 R 28	FARMAX R85	17
	320/70 R 28	FARMAX R70	27
	340/85 R 28	FARMAX R85	17
	360/70 R 28	FARMAX R70	27
	380/85 R 28	FARMAX R85	17
	380/70 R 28	FARMAX R70	27
	420/85 R 28	FARMAX R85	17
	420/70 R 28	FARMAX R70	27
	480/70 R 28	FARMAX R70	27
	480/65 R 28	FARMAX R65	32
	540/65 R 28	FARMAX R65	32

Rim Diameter	Tyre Size	Pattern	Page No.
30	380/85 R 30	FARMAX R85	17
	420/85 R 30	FARMAX R85	18
	420/70 R 30	FARMAX R70	28
	460/85 R 30	FARMAX R85	18
	480/70 R 30	FARMAX R70	28
	520/70 R 30	FARMAX R70	28
	540/65 R 30	FARMAX R65	32
32	320/85 R 32	FARMAX R85	18
	320/85 R 32	FARMAX R85	18
34	380/85 R 34	FARMAX R85	18
	420/85 R 34	FARMAX R85	18
	420/85 R 34	FARMAX R85	19
	460/85 R 34	FARMAX R85	19
	480/70 R 34	FARMAX R70	28
	520/70 R 34	FARMAX R70	29
	540/65 R 34	FARMAX R65	33
36	600/65 R 34	FARMAX R65	33
	320/85 R 36	FARMAX R85	19
36	340/85 R 36	FARMAX R85	20
	320/85 R 38	FARMAX R85	20
38	340/85 R 38	FARMAX R85	20
	380/80 R 38	FARMAX R80	23
	420/85 R 38	FARMAX R85	20
	460/85 R 38	FARMAX R85	21
	520/85 R 38	FARMAX R85	21
	520/70 R 38	FARMAX R70	29
	540/65 R 38	FARMAX R65	33-34
	580/70 R 38	FARMAX R70	29
	600/65 R 38	FARMAX R65	34
	650/65 R 38	FARMAX R65	34
42	320/80 R 42	FARMAX RC	36
	480/80 R 42	FARMAX R80	23
	520/85 R 42	FARMAX R85	21-22
	650/65 R 42	FARMAX R65	34
46	300/95 R 46	FARMAX RC	36
	380/90 R 46	FARMAX RC	36
	480/80 R 46	FARMAX R80	23
	520/85 R 46	FARMAX R85	22
48	230/95 R 48	FARMAX RC	36
	270/95 R 48	FARMAX RC	37
	340/85 R 48	FARMAX RC	37



# BIAS PATTERN INDEX

Rim Diameter	Tyre Size	Pattern	Page4	Pattern	Page	Pattern	Page
15.5	400/60-15.5	TR800	52				
16	10.00-16	Farmax F2M	44				
	11.00-16	Farmax F2M	44				
17	500/50-17	FLOTATION T422	49				
	480/45-17	FLOTATION PLUS	53				
18	12.5-18	MPT 602	60				
20	10.00-20	MPT 602	60				
	12.5-20	MPT 602	60				
	405/70-20 (16.0/70-20)	MPT 602	60	MPT 800	61		
22.5	500/60-22.5	FLOTATION T422	49	T422 VALUE PRO	51	FLOTATION TX440	54
	550/45-22.5	FLOTATION T422	49	T422 VALUE PRO	51		
	550/60-22.5	FLOTATION T422	49	T422 VALUE PRO	51	FLOTATION TX440	54
	600/50-22.5	FLOTATION T422	49			FLOTATION TX440	
	600/55-22.5	FLOTATION T422	49				
	700/40-22.5	FLOTATION T422	49			FLOTATION TX440	54
	700/50-22.5	FLOTATION T422	49				
24	8.3-24	FARMAX R1	41	IRROGATOR	56		
	9.5-24	FARMAX R1	41				
	11.2-24	FARMAX R1	41				
	12.4-24	FARMAX R1	41				
	13.6-24	FARMAX R1	41	IRROGATOR	56		
	14.9-24	FARMAX R1	41				
	16.9-24	FARMAX R1	41				
	405/70-24 (16.0/70-24)	MPT 602	60	MPT 800	61		
26	18.4-26	FARMAX R1	41				
26.5	600/55-26.5	FLOTATION T422	49				
	700/50-26.5	FLOTATION T422	49				
	800/45-26.5	FLOTATION T422	49				



Rim Diameter	Tyre Size	Pattern	Page	Pattern	Page	Pattern	Page
28	11.2-28	FARMAX R1	41				
	12.4-28	FARMAX R1	41				
	13.6-28	FARMAX R1	42				
	14.9-28	FARMAX R1	42				
	16.9-28	FARMAX R1	42				
30	16.9-30	FARMAX R1	42				
	18.4-30	FARMAX R1	42				
34	18.4-34	FARMAX R1	42				
36	13.6-36	FARMAX R1	42				
38	11.2-38	IRROGATOR	56				
	13.6-38	FARMAX R1	42				
	15.5-38	FARMAX R1	42				
	16.9-38	FARMAX R1	42				
	18.4-38	FARMAX R1	42				





# TRACTOR



FARMAX R80/R85



FARMAX R70



FARMAX R65



FARMAX RC



FARMAX R1

# TRACTOR FRONT



FARMAX F2M

The images used are for representation purpose only



# FLOTATION



FLOATMAX FT (RADIAL)



FLOTATION T422



T422 VALUE PRO



FLOTATION PLUS



TR800



FLOTATION TX440

# IRROGATOR



IRROGATOR



IRROGATOR R1

The images used are for representation purpose only



## AGRO INDUSTRIAL/ MULTIUSE



**LIFT PRO**



**MPT 602**



**MPT 800**

The images used are for representation purpose only



# TABLE HEADER

Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed				
			SW	OD				Static	kmph mph			
			mm in	mm in					6	12	19	25
								Maximum Load				kg lbs

LI- LOAD INDEX  
SS- SPEED SYMBOL

SECTION WIDTH

OVERALL DIAMETER

STATIC LOADED RADIUS

ROLLING CIRCUMFERENCE

INFLATION PRESSURE





# TRACTOR RADIAL



# 85 SERIES AG RADIAL

WITH THE POWER OF CTR\*

## FEATURE

- R1-W tread depth

## BENEFIT

- Longer tyre life

## FEATURE

- Rounded shoulder

## BENEFIT

- Lesser damage to soil and crop

## FEATURE

- Higher angle and lug overlap at centre

## BENEFIT

- Better roadability



## FEATURE

- Lower angle at shoulder

## BENEFITS

- Superior traction

## FEATURE

- Wider tread
- Larger inner volume

## BENEFIT

- Reduced soil compaction

\*CTR-Low Compaction, High traction, High Roadability



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10	20	30	40	50
			mm in	mm in	mm in	6			12	19	25	31	
							bar psi	Maximum Load				kg lbs	

**FARMAX R 85**

R 20													
280/85 R 20 (11.2 R 20)	112 A8/B	W10 W9	285 11.2	984 38.7	447 17.6	2914 114.7	0.8	1730	1130	920	800	750	750
							12	3810	2490	2030	1760	1650	1650
							1	1960	1280	1050	910	850	850
							15	4320	2820	2310	2000	1870	1870
320/85 R 20 (12.4 R 20)	119 A8/B	W10 W11 W9	320 12.6	1052 41.4	474 18.7	3102 122.1	1.3	2280	1490	1220	1060	990	990
							19	5020	3280	2690	2330	2180	2180
							1.6	2580	1680	1380	1200	1120	1120
							23	5680	3700	3040	2640	2470	2470
250/85 R 24 (9.5 R 24)	109 A8/B	W8 W7 W9	250 9.8	1036 40.8	477 18.8	3097 121.9	0.8	1590	1040	850	740	690	690
							12	3500	2290	1870	1630	1520	1520
							1	1790	1170	960	830	780	780
							15	3940	2580	2110	1830	1720	1720
280/85 R 24 (11.2 R 24)	115 A8/B	W10 W9	285 11.2	1086 42.8	498 19.6	3235 127.4	1.3	2090	1370	1120	970	910	910
							19	4600	3020	2470	2140	2000	2000
							1.6	2370	1550	1270	1100	1030	1030
							23	5220	3410	2800	2420	2270	2270
320/85 R 24 (12.4 R 24)	122 A8/B	W11 W10 W9	325 12.8	1154 45.4	525 20.7	3423 134.8	0.8	1860	1220	1000	870	810	810
							12	4100	2690	2200	1920	1780	1780
							1	2120	1380	1130	980	920	920
							15	4670	3040	2490	2160	2030	2030
280/85 R 24 (11.2 R 24)	115 A8/B	W10 W9	285 11.2	1086 42.8	498 19.6	3235 127.4	1.3	2480	1620	1330	1160	1080	1080
							19	5460	3570	2930	2560	2380	2380
							1.6	2790	1820	1490	1300	1215	1215
							23	6150	4010	3280	2860	2680	2680
320/85 R 24 (12.4 R 24)	122 A8/B	W11 W10 W9	325 12.8	1154 45.4	525 20.7	3423 134.8	0.8	2300	1500	1230	1070	1000	1000
							12	5070	3300	2710	2360	2200	2200
							1	2620	1710	1400	1220	1140	1140
							15	5770	3770	3080	2690	2510	2510
280/85 R 24 (11.2 R 24)	115 A8/B	W10 W9	285 11.2	1086 42.8	498 19.6	3235 127.4	1.3	3060	2000	1640	1420	1330	1330
							19	6740	4410	3610	3130	2930	2930
							1.6	3450	2250	1850	1610	1500	1500
							23	7600	4960	4070	3550	3300	3300

These are tubeless tyres





Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10	20	30	40	50
			mm in	mm in	mm in	mm in	bar psi		Maximum Load		kg lbs		

320/85 R 24 (12.4 R 24)	142 A8/B	W11 W10 W9	325 12.8	1154 45.4	525 20.7	3423 134.8	3	4990	3260	2670	2320	2170	2170
							44	10990	7180	5880	5110	4780	4780
							3.4	5380	3510	2880	2500	2340	2340
							49	11850	7730	6340	5510	5150	5150
							3.8	5750	3750	3080	2680	2500	2500
55	12670	8260	6780	5900	5510	5510							
							4.2	6100	3980	3260	2840	2650	2650
							61	13440	8770	7180	6260	5840	5840
340/85 R 24 (13.6 R 24)	125 A8/B	W12 W11	355 14	1188 46.8	542 21.3	3528 138.9	0.8	2530	1650	1350	1180	1100	1100
							12	5570	3630	2970	2600	2420	2420
							1	2880	1880	1540	1340	1250	1250
							15	6340	4140	3390	2950	2750	2750
							1.3	3360	2190	1800	1560	1460	1460
19	7400	4820	3960	3440	3220	3220							
							1.6	3800	2480	2030	1770	1650	1650
							23	8370	5460	4470	3900	3630	3630
380/85 R 24 (14.9 R 24)	131 A8/B	W12 W13 W11	385 15.2	1260 49.6	571 22.5	3728 146.8	0.8	2990	1950	1600	1390	1300	1300
							12	6590	4300	3520	3060	2860	2860
							1	3400	2220	1820	1580	1480	1480
							15	7490	4890	4010	3480	3260	3260
							1.3	3980	2600	2130	1850	1730	1730
19	8770	5730	4690	4070	3810	3810							
							1.6	4490	2930	2400	2090	1950	1950
							23	9890	6450	5290	4600	4300	4300
420/85 R 24 (16.9 R 24)	137 A8/B	W15L W14L W13	450 17.7	1324 52.1	597 23.5	3906 153.8	0.8	3520	2300	1880	1640	1530	1530
							12	7750	5070	4140	3610	3370	3370
							1	4030	2630	2150	1870	1750	1750
							15	8880	5790	4740	4120	3850	3850
							1.3	4690	3060	2510	2180	2040	2040
19	10330	6740	5530	4800	4490	4490							
							1.6	5290	3450	2830	2460	2300	2300
							23	11650	7600	6230	5420	5070	5070
280/85 R 28 (11.2 R 28)	118 A8/B	W10 W9	285 11.2	1187 46.7	548 21.6	3553 139.9	0.8	2020	1320	1080	940	880	880
							12	4450	2910	2380	2070	1940	1940
							1	2300	1500	1230	1070	1000	1000
							15	5070	3300	2710	2360	2200	2200
							1.3	2690	1760	1440	1250	1170	1170
19	5930	3880	3170	2750	2580	2580							
							1.6	3040	1980	1620	1410	1320	1320
							23	6700	4360	3570	3110	2910	2910

R 28

These are tubeless tyres





Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10	20	30	40	50
			mm in	mm in	mm in	mm in			bar psi	Maximum Load			kg lbs

320/85 R 28 (11.2 R 28)	124 A8/B	W11 W10 W9	330 13.0	1255 49.4	574 22.6	3698 145.6	0.8	2460	1610	1320	1140	1070	1070
							12	5420	3550	2910	2510	2360	2360
							1	2810	1830	1500	1310	1220	1220
							15	6190	4030	3300	2890	2690	2690
							1.3	3270	2130	1750	1520	1420	1420
19	7200	4690	3850	3350	3130	3130							
							1.6	3680	2400	1970	1710	1600	1600
							23	8110	5290	4340	3770	3520	3520
340/85 R 28 (13.6 R 28)	127 A8/B	W12 W11	355 14	1289 50.7	592 23.3	3846 151.4	0.8	2690	1760	1440	1250	1170	1170
							12	5930	3880	3170	2750	2580	2580
							1	3060	2000	1640	1420	1330	1330
							15	6740	4410	3610	3130	2930	2930
							1.3	3570	2330	1910	1660	1550	1550
19	7860	5130	4210	3660	3410	3410							
							1.6	4030	2630	2150	1870	1750	1750
							23	8880	5790	4740	4120	3850	3850
380/85 R 28 (14.9 R 28)	133 A8/B	W12 W13 W11	390 15.4	1357 53.4	620 24.4	4035 158.9	0.8	3150	2060	1690	1470	1370	1370
							12	6940	4540	3720	3240	3020	3020
							1	3590	2340	1920	1670	1560	1560
							15	7910	5150	4230	3680	3440	3440
							1.3	4190	2730	2240	1950	1820	1820
19	9230	6010	4930	4300	4010	4010							
							1.6	4740	3090	2530	2200	2060	2060
							23	10440	6810	5570	4850	4540	4540
420/85 R 28 (16.9 R 28)	139 A8/B	W15L W14L W13	450 17.7	1425 56.1	648 25.5	4224 166.3	0.8	3730	2430	1990	1730	1620	1620
							12	8220	5350	4380	3810	3570	3570
							1	4260	2780	2280	1980	1850	1850
							15	9380	6120	5020	4360	4070	4070
							1.3	4950	3230	2640	2300	2150	2150
19	10900	7110	5810	5070	4740	4740							
							1.6	5590	3650	2990	2600	2430	2430
							23	12310	8040	6590	5730	5350	5350
380/85 R 30 (14.9 R 30)	135 A8/B	W12 W13 W11	385 15.2	1408 55.4	646 25.4	4195 165.2	0.8	3340	2180	1780	1550	1450	1450
							12	7360	4800	3920	3410	3190	3190
							1	3820	2490	2040	1780	1660	1660
							15	8410	5480	4490	3920	3660	3660
							1.3	4440	2900	2370	2070	1930	1930
19	9780	6390	5220	4560	4250	4250							
							1.6	5010	3270	2680	2330	2180	2180
							23	11040	7200	5900	5130	4800	4800

R 30

These are tubeless tyres



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10 6	20 12	30 19	40 25	50 31
			mm in	mm in	Maximum Load			kg lbs					

420/85 R 30 (16.9 R 30)	140 A8/B	W15L W14L W13	450 17.7	1476 58.1	673 26.5	4385 172.6	0.8 12	3840 8460	2510 5530	2050 4520	1790 3940	1670 3680	1670 3680
							1 15	4370 9630	2850 6280	2340 5150	2030 4470	1900 4190	1900 4190
							1.3 19	5080 11190	3320 7310	2720 5990	2360 5200	2210 4870	2210 4870
							1.6 23	5750 12670	3750 8260	3080 6780	2680 5900	<b>2500</b> 5510	2500 5510
420/85 R 30	147 A8/B	W15L W14L W13	450 17.7	1476 58.1	673 26.5	4385 172.6	1.8 26	5980 13170	3900 8590	3200 7050	2780 6120	2600 5730	2600 5730
							2 29	6350 13990	4140 9120	3390 7470	6120 2950	2760 6080	2760 6080
							2.2 32	6720 14800	4380 9650	3590 7910	6500 3120	2920 6430	2920 6430
							2.4 35	7070 15570	4610 10150	3780 8330	3290 7250	<b>3075</b> <b>6770</b>	3075 6780
460/85 R 30 (18.4 R 30)	145 A8/B	W16L W15L W14L	480 18.9	1544 60.8	701 27.6	4574 180.1	0.8 12	4440 9780	2900 6390	2370 5220	2070 4560	1930 4250	1930 4250
							1 15	5060 11150	3300 7270	2710 5970	2350 5180	2200 4850	2200 4850
							1.3 19	5910 13020	3860 8500	3160 6960	2750 6060	2570 5660	2570 5660
							1.6 23	6670 14690	4350 9580	3570 7860	3100 6830	<b>2900</b> 6390	2900 6390
R 32 320/85 R 32 (12.4 R 32)	126 A8/B	W11 W10 W9	325 12.8	1357 53.4	627 24.7	4062 159.9	0.8 12	2600 5730	1700 3740	1390 3060	1210 2670	1130 2490	1130 2490
							1 15	2970 6540	1940 4270	1590 3500	1380 3040	1290 2840	1290 2840
							1.3 19	3470 7640	2270 5000	1860 4100	1620 3570	1510 3330	1510 3330
							1.6 23	3910 8610	2550 5620	2090 4600	1820 4010	<b>1700</b> 3740	1700 3740
320/85 R 32 (12.4 R 32)	142 A8/B	W11 W10 W9	325 12.8	1357 53.4	627 24.7	4062 160	3 44	5150 11340	3360 7400	2760 6080	2400 5290	2240 4930	2240 4930
							3.4 49	5540 12200	3620 7970	2960 6520	2580 5680	2410 5310	2410 5310
							3.8 55	5910 13020	3860 8500	3160 6960	2750 6060	2570 5660	2570 5660
							4 58	6100 13440	3980 8770	3260 7180	2840 6260	<b>2650</b> <b>5840</b>	2650 5840

These are tubeless tyres



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10	20	30	40	50
			mm in	mm in	mm in	6			12	19	25	31	
							bar psi	Maximum Load			kg lbs		

R 34													
380/85 R 34 (14.9 R 34)	137 A8/B	W12 W13 W11	385 15.2	1510 59.4	697 27.4	4516 177.8	0.8	3520	2300	1880	1640	1530	1530
							12	7750	5070	4140	3610	3370	3370
							1	4030	2630	2150	1870	1750	1750
							15	8880	5790	4740	4120	3850	3850
420/85 R 34 (16.9 R 34)	142 A8/B	W15L W14L W13	450 17.7	1578 62.1	724 28.5	4705 185.3	1.3	4690	3060	2510	2180	2040	2040
							19	10330	6740	5530	4800	4490	4490
							1.6	5290	3450	2830	2460	2300	2300
							23	11650	7600	6230	5420	5070	5070
420/85 R 34 (16.9 R 34)	147 A8/B	W15L W14L W13	450 17.7	1578 62.1	724 28.5	4705 185.3	0.8	4070	2660	2180	1890	1770	1770
							12	8960	5860	4800	4160	3900	3900
							1	4620	3020	2470	2150	2010	2010
							15	10180	6650	5440	4740	4430	4430
420/85 R 34 (16.9 R 34)	147 A8/B	W15L W14L W13	450 17.7	1578 62.1	724 28.5	4705 185.3	1.3	5410	3530	2890	2510	2350	2350
							19	11920	7780	6370	5530	5180	5180
							1.6	6100	3980	3260	2840	2650	2650
							23	13440	8770	7180	6260	5840	5840
460/85 R 34 (18.4 R 34)	147 A8/B	W16L W15L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	1.3	4950	3230	2640	2300	2150	2150
							19	10900	7110	5810	5070	4740	4740
							1.6	5590	3650	2990	2600	2430	2430
							23	12310	8040	6590	5730	5350	5350
460/85 R 34 (18.4 R 34)	147 A8/B	W16L W15L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	2	6350	4140	3390	2950	2760	2760
							29	13990	9120	7470	6500	6080	6080
							2.4	7070	4610	3780	3290	3075	3075
							35	15570	10150	8330	7250	6770	6770
460/85 R 34 (18.4 R 34)	147 A8/B	W16L W15L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	0.8	4720	3080	2520	2190	2050	2050
							12	10400	6780	5550	4820	4520	4520
							1	5380	3510	2880	2500	2340	2340
							15	11850	7730	6340	5510	5150	5150
460/85 R 34 (18.4 R 34)	147 A8/B	W16L W15L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	1.3	6260	4080	3350	2910	2720	2720
							19	13790	8990	7380	6410	5990	5990
							1.6	7070	4610	3780	3290	3075	3075
							23	15570	10150	8330	7250	6770	6770
R 36													
460/85 R 34 (18.4 R 34)	157 A8/B	W16L W15L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	2	7480	4880	4000	3480	3250	3250
							29	16480	10750	8810	7670	7160	7160
							2.3	8120	5300	4340	3780	3530	3530
							33	17890	11670	9560	8330	7780	7780
460/85 R 34 (18.4 R 34)	157 A8/B	W16L W15L W14L	480 18.9	1646 64.8	752 29.6	4895 192.7	2.6	8720	5690	4660	4060	3790	3790
							38	19210	12530	10260	8940	8350	8350
							3	9490	6190	5070	4410	4125	4125
							44	20900	13630	11170	9710	9090	9090

These are tubeless tyres



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10 6	20 12	30 19	40 25	50 31
			mm in	mm in	Maximum Load			kg lbs					

R 38

320/85 R 36 (12.4 R 36)	128 A8/B	W11 W10 W9	325 12.8	1458 57.4	677 26.7	4380 172.4	0.8 12	2760 6080	1800 3960	1480 3260	1280 2820	1200 2640	1200 2640
							1 15	3150 6940	2060 4540	1690 3720	1470 3240	1370 3020	1370 3020
							1.3 19	3660 8060	2390 5260	1960 4320	1700 3740	1590 3500	1590 3500
							1.6 23	4140 9120	2700 5950	2210 4870	1930 4250	1800 3960	1800 3960
340/85 R 36 (13.6 R 36)	132 A8/B	W12 W11	355 14	1492 58.7	694 27.3	4485 176.6	0.8 12	3060 6740	2000 4410	1640 3610	1420 3130	1330 2930	1330 2930
							1 15	3500 7710	2280 5020	1870 4120	1630 3590	1520 3350	1520 3350
							1.3 19	4070 8960	2660 5860	2180 4800	1890 4160	1770 3900	1770 3900
							1.6 23	4600 10130	3000 6610	2460 5420	2140 4710	2000 4410	2000 4410
320/85 R 38	143 A8/B	W11 W10 W9	325 12.8	1510 59.4	703 27.7	4543 178.9	2.4 35	4950 10900	3230 7110	2640 5810	2300 5070	2150 4740	2150 4740
							2.8 41	5410 11920	3530 7780	2890 6370	2510 5530	2350 5180	2350 5180
							3.2 46	5840 12860	3810 8390	3120 6870	2720 5990	2540 5590	2540 5590
							3.6 52	6270 13810	4090 9010	3350 7380	2920 6430	2725 6000	2725 6000
340/85 R 38 (13.6 R 38)	133 A8/B	W12 W11	355 14	1543 60.7	719 28.3	4645 182.9	0.8 12	3150 6940	2060 4540	1690 3720	1470 3240	1370 3020	1370 3020
							1 15	3590 7910	2340 5150	1920 4230	1670 3680	1560 3440	1560 3440
							1.3 19	4190 9230	2730 6010	2240 4930	1950 4300	1820 4010	1820 4010
							1.6 23	4740 10440	3090 6810	2530 5570	2200 4850	2060 4540	2060 4540
340/85 R 38 (13.6 R 38)	148 A8/B	W12 W11	355 14	1543 60.7	719 28.3	4645 182.9	3 44	6140 13520	4010 8830	3280 7220	2860 6300	2670 5880	2670 5880
							3.4 49	6600 14540	4310 9490	3530 7780	3070 6760	2870 6320	2870 6320
							3.8 55	7040 15510	4590 10110	3760 8280	3270 7200	3060 6740	3060 6740
							4 58	7250 15970	4730 10420	3870 8520	3370 7420	3150 6940	3150 6940

These are tubeless tyres



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	bar psi	Maximum Load			kg lbs		

420/85 R 38 (16.9 R 38)	144 A8/B	W15L W14L W13	450 17.7	1680 66.1	775 30.5	5026 197.9	0.8 12	4300 9470	2810 6190	2300 5070	2000 4410	1870 4120	1870 4120
							1 15	4900 10790	3200 7050	2620 5770	2280 5020	2130 4690	2130 4690
							1.3 19	5700 12560	3720 8190	3050 6720	2650 5840	2480 5460	2480 5460
							1.6 23	6440 14190	4200 9250	3440 7580	3000 6610	2800 6170	2800 6170
460/85 R 38 (18.4 R 38)	149 A8/B	W16L W15L W14L	480 18.9	1747 68.8	803 31.6	5213 205.2	0.8 12	4990 10990	3260 7180	2670 5880	2320 5110	2170 4780	2170 4780
							1 15	5680 12510	3710 8170	3040 6700	2640 5810	2470 5440	2470 5440
							1.3 19	6620 14580	4320 9520	3540 7800	3080 6780	2880 6340	2880 6340
							1.6 23	7480 16480	4880 10750	4000 8810	3480 7670	3250 7160	3250 7160
460/85 R 38 (18.4 R 38)	167 A8/B	W16L W15L W14L	480 18.9	1747 68.8	803 31.6	5213 205.2	2 29	7910 17420	5160 11370	4230 9320	3680 8110	3440 7580	3440 7580
							3 44	10030 22090	6540 14410	5360 11810	4670 10290	4360 9600	4360 9600
							4 58	11850 26100	7730 17030	6330 13940	5510 12140	5150 11340	5150 11340
							4.4 64	12540 27620	8180 18020	6700 14760	5830 12840	5450 12000	5450 12000
520/85 R 38 (20.8 R 38)	155 A8/B	DW16L DW18L	530 20.9	1855 73	847 33.3	5513 217.1	0.8 12	5930 13060	3870 8520	3170 6980	2760 6080	2580 5680	2580 5680
							1 15	6760 14890	4410 9710	3620 7970	3150 6940	2940 6480	2940 6480
							1.3 19	7890 17380	5150 11340	4220 9300	3670 8080	3430 7560	3430 7560
							1.6 23	8910 19630	5810 12800	4770 10510	4150 9140	3875 8540	3875 8540
520/85 R 38 (20.8 R 38)	169 A8/B	DW16 DW18L	530 20.9	1855 73	847 33.3	5513 217.1	2.4 35	10510 23150	6860 15110	5620 12380	4890 10770	4570 10070	4570 10070
							2.8 41	11500 25330	7500 16520	6150 13550	5350 11780	5000 11010	5000 11010
							3.2 46	12440 27400	8120 17890	6650 14650	5790 12750	5410 11920	5410 11920
							3.6 52	13340 29380	8700 19160	7130 15700	6210 13680	5800 12780	5800 12780

These are tubeless tyres



Size	L/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10	20	30	40	50
			mm in	mm in	mm in	6	12		19	25	31		

bar psi		Maximum Load			kg lbs		
---------	--	--------------	--	--	--------	--	--

R 42													
520/85 R 42 (20.8 R 42)	157 A8/B	DW16L DW18L	530 20.9	1951 76.8	889 35	5791 228	0.8	6330	4130	3380	2940	2750	2750
							12	13940	9100	7440	6480	6060	6060
							1	7200	4700	3850	3350	3130	3130
							15	15860	10350	8480	7380	6890	6890
520/85 R 42 (20.8 R 42)	169 A8/B	DW16L DW18L	530 20.87	1951 76.81	889 35	5791 228	1.3	8400	5480	4490	3910	3650	3650
							19	18500	12070	9890	8610	8040	8040
							1.6	9490	6190	5070	4410	4125	4125
							23	20900	13630	11170	9710	9090	9090
520/85 R 42 (20.8 R 42)	169 A8/B	DW16L DW18L	530 20.87	1951 76.81	889 35	5791 228	1	6510	4250	3480	3030	2830	2830
							15	14340	9360	7670	6670	6230	6230
							2	9780	6380	5230	4550	4250	4250
							29	21540	14050	11520	10020	9360	9360
520/85 R 42 (20.8 R 42)	169 A8/B	DW16L DW18L	530 20.87	1951 76.81	889 35	5791 228	2.8	11910	7770	6370	5540	5180	5180
							41	26230	17110	14030	12200	11410	11410
							3.4	13340	8700	7130	6210	5800	5800
							49	29380	19160	15700	13680	12780	12780
R 46													
520/85 R 46 (20.8 R 46)	158 A8/B	DW16L DW18L	530 20.9	2052 80.8	939 37.0	6109 240.5	0.8	6510	4250	3480	3030	2830	2830
							12	14340	9360	7670	6670	6230	6230
							1	7430	4850	3970	3460	3230	3230
							15	16370	10680	8740	7620	7110	7110
520/85 R 46 (20.8 R 46)	158 A8/B	DW16L DW18L	530 20.9	2052 80.8	939 37.0	6109 240.5	1.3	8650	5640	4620	4020	3760	3760
							19	19050	12420	10180	8850	8280	8280
							1.6	9780	6380	5230	4550	4250	4250
							23	21540	14050	11520	10020	9360	9360
520/85 R 46 (20.8 R 46)	174 A8/B	DW16L DW18L	530 20.9	2052 80.8	939 37.0	6109 240.5	2.4	11430	7460	6110	5320	4970	4970
							35	25180	16430	13460	11720	10950	10950
							2.8	12510	8160	6690	5820	5440	5440
							41	27560	17970	14740	12820	11980	11980
520/85 R 46 (20.8 R 46)	174 A8/B	DW16L DW18L	530 20.9	2052 80.8	939 37.0	6109 240.5	3.2	13520	8820	7230	6290	5880	5880
							46	29780	19430	15930	13850	12950	12950
							4	15410	10050	8240	7170	6700	6700
							58	33940	22140	18150	15790	14760	14760

These are tubeless tyres





Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in	bar psi	Maximum Load			kg lbs		

### FARMAX R 80

R 38	380/80 R 38	142 A8/B	W11 W12 W13	380 15	1573 61.9	731 28.8	4728 186.2	1 15	3660 8060	2390 5260	1960 4320	1700 3740	1590 3500	1590 3500
								1.6 23	4810 10590	3140 6920	2570 5660	2240 4930	2090 4600	2090 4600
								2 29	5470 12050	3570 7860	2930 6450	2550 5620	2380 5240	2380 5240
								<b>2.4</b> 35	6100 13440	3980 8770	3260 7180	2840 6260	<b>2650</b> 5840	2650 5840
R 42	480/80 R 42 (18.4 R 42)	151 A8/B	DW16L	485 19.1	1835 72.2	848 33.4	5472 216.3	0.8 12	5290 11650	3450 7600	2830 6230	2460 5420	2300 5070	2300 5070
								1 15	6030 13280	3930 8660	3220 7090	2800 6170	2620 5770	2620 5770
								1.3 19	7040 15510	4590 10110	3760 8280	3270 7200	3060 6740	3060 6740
								<b>1.6</b> 23	7940 17490	5180 11410	4240 9340	3690 8130	<b>3450</b> 7600	3450 7600
R 46	480/80 R 46 (18.4 R 46)	158 A8/B	DW16L	485 19.1	1940 76.4	900 35.4	5800 228.3	1.3 19	6830 15040	4460 9820	3650 8040	3180 7000	2970 6540	2970 6540
								1.6 23	7710 16980	5030 11080	4120 9070	3580 7890	3350 7380	3350 7380
								2 29	8790 19360	5730 12620	4700 10350	4090 9010	3820 8410	3820 8410
								<b>2.4</b> 35	9780 21540	6380 14050	5230 11520	4550 10020	<b>4250</b> 9360	4250 9360



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10	20	30	40	50
			mm in	mm in	mm in	mm in			bar psi	Maximum Load			kg lbs

**FARMAX R 70**

R 20							Infl. Press.	Static	10	20	30	40	50
Size	LI/SS	Rim	SW	OD	SLR	RC	bar psi	Maximum Load	kg lbs	kg lbs	kg lbs	kg lbs	kg lbs
260/70 R 20	113 A8/B	W9 W8	260 10.2	872 34.3	401 15.8	2605 102.6	1.2 17	1770 3900	1160 2560	950 2090	820 1810	770 1700	770 1700
							1.6 23	2090 4600	1370 3020	1120 2470	970 2140	910 2000	910 2000
							2 29	2370 5220	1550 3410	1270 2800	1100 2420	1030 2270	1030 2270
							<b>2.4</b> 35	2650 5840	1730 3810	1410 3110	1230 2710	<b>1150</b> 2530	1150 2530
280/70 R 20	116 A8/B	W10 W9	290 11.4	900 35.4	413 16.3	2682 105.6	1.2 17	1910 4210	1250 2750	1020 2250	890 1960	830 1830	830 1830
							1.6 23	2280 5020	1490 3280	1220 2690	1060 2330	990 2180	990 2180
							2 29	2580 5680	1680 3700	1380 3040	1200 2640	1120 2470	1120 2470
							<b>2.4</b> 35	2880 6340	1880 4140	1540 3390	1340 2950	<b>1250</b> 2750	1250 2750
300/70 R 20	110 A8/B	W9 W10	295 11.6	952 37.5	434 17.1	2826 111.3	0.8 12	1630 3590	1070 2360	870 1920	760 1670	710 1560	710 1560
							1 15	1860 4100	1220 2690	1000 2200	870 1920	810 1780	810 1780
							1.3 19	2160 4760	1410 3110	1160 2560	1010 2220	940 2070	940 2070
							<b>1.6</b> 23	2440 5370	1590 3500	1300 2860	1130 2490	<b>1060</b> 2330	1060 2330
300/70 R 20	120 A8/B	W9 W10	295 11.6	952 37.5	434 17.1	2826 111.3	1.3 19	2250 4960	1470 3240	1210 2670	1050 2310	980 2160	980 2160
							1.6 23	2530 5570	1650 3630	1350 2970	1180 2600	1100 2420	1100 2420
							2 29	2900 6390	1890 4160	1550 3410	1350 2970	1260 2780	1260 2780
							<b>2.4</b> 35	3220 7090	2100 4630	1720 3790	1500 3300	<b>1400</b> 3080	1400 3080
320/70 R 20	113 A8/B	W9 W10 W11	320 12.6	982 38.7	446 17.6	2909 114.5	0.8 12	1770 3900	1160 2560	950 2090	820 1810	770 1700	770 1700
							1 15	2000 4410	1310 2890	1070 2360	930 2050	870 1920	870 1920
							1.3 19	2350 5180	1530 3370	1250 2750	1090 2400	1020 2250	1020 2250
							<b>1.6</b> 23	2650 5840	1730 3810	1410 3110	1230 2710	<b>1150</b> 2530	1150 2530

These are tubeless tyres





Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10	20	30	40	50
			mm in	mm in	mm in	mm in			bar psi	Maximum Load		kg lbs	
320/70 R 20	123 A8/B	W9 W10 W11	320 12.6	982 38.7	446 17.6	2909 114.5	1.3	2480	1620	1330	1160	1080	1080
							19	5460	3570	2930	2560	2380	2380
							1.6	2810	1830	1500	1310	1220	1220
							23	6190	4030	3300	2890	2690	2690
360/70 R 20	120 A8/B	W12 W11 W10	360 14.2	1042 41	470 18.5	3075 121	2	3200	2090	1710	1490	1390	1390
							29	7050	4600	3770	3280	3060	3060
							2.4	3570	2330	1910	1660	1550	1550
							35	7860	5130	4210	3660	3410	3410
360/70 R 20	129 A8/B	W12 W11 W10	360 14.2	1042 41	470 18.5	3075 121	0.8	2140	1400	1140	1000	930	930
							12	4710	3080	2510	2200	2050	2050
							1	2440	1590	1300	1130	1060	1060
							15	5370	3500	2860	2490	2330	2330
360/70 R 20	129 A8/B	W12 W11 W10	360 14.2	1042 41	470 18.5	3075 121	1.3	2850	1860	1530	1330	1240	1240
							19	6280	4100	3370	2930	2730	2730
							1.6	3220	2100	1720	1500	1400	1400
							23	7090	4630	3790	3300	3080	3080
380/70 R 20	122 A8/B	W13 W12 W11	380 15	1082 42.6	486 19.2	3185 125.4	1.3	2970	1940	1590	1380	1290	1290
							19	6540	4270	3500	3040	2840	2840
							1.6	3360	2190	1800	1560	1460	1460
							23	7400	4820	3960	3440	3220	3220
380/70 R 20	132 A8/B	W13 W12 W11	380 15	1082 42.6	486 19.2	3185 125.4	2	3820	2490	2040	1780	1660	1660
							29	8410	5480	4490	3920	3660	3660
							2.4	4260	2780	2280	1980	1850	1850
							35	9380	6120	5020	4360	4070	4070
380/70 R 20	122 A8/B	W13 W12 W11	380 15	1082 42.6	486 19.2	3185 125.4	0.8	2300	1500	1230	1070	1000	1000
							12	5070	3300	2710	2360	2200	2200
							1	2620	1710	1400	1220	1140	1140
							15	5770	3770	3080	2690	2510	2510
380/70 R 20	132 A8/B	W13 W12 W11	380 15	1082 42.6	486 19.2	3185 125.4	1.3	3060	2000	1640	1420	1330	1330
							19	6740	4410	3610	3130	2930	2930
							1.6	3450	2250	1850	1610	1500	1500
							23	7600	4960	4070	3550	3300	3300
380/70 R 20	132 A8/B	W13 W12 W11	380 15	1082 42.6	486 19.2	3185 125.4	1.3	3220	2100	1720	1500	1400	1400
							19	7090	4630	3790	3300	3080	3080
							1.6	3630	2370	1940	1690	1580	1580
							23	8000	5220	4270	3720	3480	3480
380/70 R 20	132 A8/B	W13 W12 W11	380 15	1082 42.6	486 19.2	3185 125.4	2	4140	2700	2210	1930	1800	1800
							29	9120	5950	4870	4250	3960	3960
							2.4	4600	3000	2460	2140	2000	2000
							35	10130	6610	5420	4710	4410	4410

These are tubeless tyres



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10	20	30	40	50
			mm in	mm in	mm in	6			12	19	25	31	
							bar psi	Maximum Load			kg lbs		

R 24							0.8	1910	1250	1020	890	830	830
320/70 R 24	116 A8/B	W9 W10 W11	320 12.6	1095 43.1	501 19.7	3260 128.4	12	4210	2750	2250	1960	1830	1830
							1	2190	1430	1170	1020	950	950
							15	4820	3150	2580	2250	2090	2090
							1.3	2550	1670	1370	1190	1110	1110
						19	5620	3680	3020	2620	2440	2440	
						1.6	2880	1880	1540	1340	1250	1250	
						23	6340	4140	3390	2950	2750	2750	
360/70 R 24	122 A8/B	W12 W11 W10	360 14.2	1152 45.4	524 20.6	3418 134.6	0.8	2300	1500	1230	1070	1000	1000
							12	5070	3300	2710	2360	2200	2200
							1	2620	1710	1400	1220	1140	1140
							15	5770	3770	3080	2690	2510	2510
						1.3	3060	2000	1640	1420	1330	1330	
						19	6740	4410	3610	3130	2930	2930	
						1.6	3450	2250	1850	1610	1500	1500	
						23	7600	4960	4070	3550	3300	3300	
380/70 R 24	125 A8/B	W13 W12 W11	380 15	1190 46.9	540 21.3	3523 138.7	0.8	2530	1650	1350	1180	1100	1100
							12	5570	3630	2970	2600	2420	2420
							1	2880	1880	1540	1340	1250	1250
							15	6340	4140	3390	2950	2750	2750
						1.3	3360	2190	1800	1560	1460	1460	
						19	7400	4820	3960	3440	3220	3220	
						1.6	3800	2480	2030	1770	1650	1650	
						23	8370	5460	4470	3900	3630	3630	
420/70 R 24	130 A8/B	W12 W13 W14L	430 16.9	1248 49.1	563 22.2	3683 145	0.8	2920	1910	1560	1360	1270	1270
							12	6430	4210	3440	3000	2800	2800
							1	3310	2160	1770	1540	1440	1440
							15	7290	4760	3900	3390	3170	3170
						1.3	3860	2520	2070	1800	1680	1680	
						19	8500	5550	4560	3960	3700	3700	
						1.6	4370	2850	2340	2030	1900	1900	
						23	9630	6280	5150	4470	4190	4190	
480/70 R 24	138 A8/B	W14L W15L W16L	490 19.3	1316 51.8	591 23.3	3871 152.4	0.8	3610	2360	1930	1680	1570	1570
							12	7950	5200	4250	3700	3460	3460
							1	4120	2690	2200	1920	1790	1790
							15	9070	5930	4850	4230	3940	3940
						1.3	4810	3140	2570	2240	2090	2090	
						19	10590	6920	5660	4930	4600	4600	
						1.6	5430	3540	2900	2530	2360	2360	
						23	11960	7800	6390	5570	5200	5200	

These are tubeless tyres



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10	20	30	40	50
			mm in	mm in	mm in	mm in			bar psi	Maximum Load		kg lbs	

R 28													
320/70 R 28	119 A8/B	W9 W10 W11	320 12.6	1190 46.9	550 21.6	3562 140.2	0.8	2090	1370	1120	970	910	910
							12	4600	3020	2470	2140	2000	2000
							1	2370	1550	1270	1100	1030	1030
							15	5220	3410	2800	2420	2270	2270
360/70 R 28	125 A8/B	W12 W11 W10	360 14.2	1251 49.3	574 22.6	3730 146.9	1.3	2760	1800	1480	1280	1200	1200
							19	6080	3960	3260	2820	2640	2640
							1.6	3130	2040	1670	1460	1360	1360
							23	6890	4490	3680	3220	3000	3000
380/70 R 28	127 A8/B	W13 W12 W11	380 15	1293 50.9	591 23.3	3846 151.4	0.8	2530	1650	1350	1180	1100	1100
							12	5570	3630	2970	2600	2420	2420
							1	2880	1880	1540	1340	1250	1250
							15	6340	4140	3390	2950	2750	2750
420/70 R 28	133 A8/B	W12 W13 W14L	430 16.9	1349 53.1	614 24.2	3985 156.9	1.3	3360	2190	1800	1560	1460	1460
							19	7400	4820	3960	3440	3220	3220
							1.6	3800	2480	2030	1770	1650	1650
							23	8370	5460	4470	3900	3630	3630
480/70 R 28	151 A8/B	W14L W15L W16L	490 19.3	1421 55.9	643 25.3	4200 165.4	0.8	2690	1760	1440	1250	1170	1170
							12	5930	3880	3170	2750	2580	2580
							1	3060	2000	1640	1420	1330	1330
							15	6740	4410	3610	3130	2930	2930
480/70 R 28	151 A8/B	W14L W15L W16L	490 19.3	1421 55.9	643 25.3	4200 165.4	1.3	3570	2330	1910	1660	1550	1550
							19	7860	5130	4210	3660	3410	3410
							1.6	4030	2630	2150	1870	1750	1750
							23	8880	5790	4740	4120	3850	3850
480/70 R 28	151 A8/B	W14L W15L W16L	490 19.3	1421 55.9	643 25.3	4200 165.4	0.8	3150	2060	1690	1470	1370	1370
							12	6940	4540	3720	3240	3020	3020
							1	3590	2340	1920	1670	1560	1560
							15	7910	5150	4230	3680	3440	3440
480/70 R 28	151 A8/B	W14L W15L W16L	490 19.3	1421 55.9	643 25.3	4200 165.4	1.3	4190	2730	2240	1950	1820	1820
							19	9230	6010	4930	4300	4010	4010
							1.6	4740	3090	2530	2200	2060	2060
							23	10440	6810	5570	4850	4540	4540
480/70 R 28	151 A8/B	W14L W15L W16L	490 19.3	1421 55.9	643 25.3	4200 165.4	2	6030	3930	3220	2800	2620	2620
							29	13280	8660	7090	6170	5770	5770
							2.4	6690	4370	3580	3110	2910	2910
							35	14740	9630	7890	6850	6410	6410
480/70 R 28	151 A8/B	W14L W15L W16L	490 19.3	1421 55.9	643 25.3	4200 165.4	2.8	7340	4790	3920	3410	3190	3190
							41	16170	10550	8630	7510	7030	7030
							3.2	7940	5180	4240	3690	3450	3450
							46	17490	11410	9340	8130	7600	7600

These are tubeless tyres





Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10 6	20 12	30 19	40 25	50 31
			mm in	mm in	mm in	mm in		Maximum Load			kg lbs		

520/70 R 34	148 A8/B	W15L W16L W18L	530 20.9	1640 64.6	746 29.4	4864 191.5	0.8	4830	3150	2580	2250	2100	2100
							12	10640	6940	5680	4960	4630	4630
							1	5500	3590	2940	2560	2390	2390
							15	12110	7910	6480	5640	5260	5260
520/70 R 38	150 A8/B	W15L W16L W18L	530 20.9	1749 68.9	800 31.5	5204 204.9	1.3	6420	4190	3430	2990	2790	2790
							19	14140	9230	7560	6590	6150	6150
							1.6	7250	4730	3870	3370	3150	3150
							23	15970	10420	8520	7420	6940	6940
580/70 R 38	155 A8/B	W18L	577 22.72	1827 71.93	832 32.7	5420 213.4	0.8	5150	3360	2760	2400	2240	2240
							12	11340	7400	6080	5290	4930	4930
							1	5870	3830	3140	2730	2550	2550
							15	12930	8440	6920	6010	5620	5620
580/70 R 38	155 A8/B	W18L	577 22.72	1827 71.93	832 32.7	5420 213.4	1.3	6830	4460	3650	3180	2970	2970
							19	15040	9820	8040	7000	6540	6540
							1.6	7710	5030	4120	3580	3350	3350
							23	16980	11080	9070	7890	7380	7380
580/70 R 38	155 A8/B	W18L	577 22.72	1827 71.93	832 32.7	5420 213.4	0.8	5930	3870	3170	2760	2580	2580
							12	13060	8520	6980	6080	5680	5680
							1	6760	4410	3620	3150	2940	2940
							15	14890	9710	7970	6940	6480	6480
580/70 R 38	155 A8/B	W18L	577 22.72	1827 71.93	832 32.7	5420 213.4	1.3	7890	5150	4220	3670	3430	3430
							19	17380	11340	9300	8080	7560	7560
							1.6	8910	5810	4770	4150	3875	3875
							23	19630	12800	10510	9140	8540	8540

These are tubeless tyres



These are tubeless tyres

# 65 SERIES AGRI RADIAL

WITH THE POWER OF CTR\*

## FEATURE

- Tilted lug tip

## BENEFIT

- Lesser vibration and noise

## FEATURE

- Mud breaker

## BENEFIT

- Better self cleaning

## FEATURE

- Higher angle and lug overlap at centre

## BENEFIT

- Better roadability



## FEATURE

- Rounded shoulder

## BENEFIT

- Lesser damage to soil and crop

## FEATURE

- Lower angle at shoulder

## BENEFIT

- Superior traction

## FEATURE

- R1-W tread depth

## BENEFIT

- Longer tire life

## FEATURES

- Wider tread
- Larger inner volume

## BENEFIT

- Reduced soil compaction

\*CTR-Low Compaction, High Traction, High Roadability





Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	Infl. Press.	Speed				kmph mph		Infl. Press.	Speed		kmph mph	
			SW	OD				Field Operations	Non-Cyclic Operations				Cyclic Operations		Cyclic Operations			
									25	40	50	65	10		15	10	15	
			16	25					31	40	6	9	Recom. Load		kg lbs			
mm in	mm in	mm in	mm in	bar psi	Maximum Load				kg lbs	bar psi	Recom. Load	kg lbs						

**FARMAX R 65**

R 24															
440/65 R 24	128 D	W13L W14L W15L	441 17.4	1182 46.5	540 21	3501 137.8	0.8	1370	1410	1300	1250	1190	1	2020	1840
							12	3020	3110	2860	2750	2620	15	4450	4050
							1	1560	1610	1490	1430	1360	1.25	2310	2110
							15	3440	3550	3280	3150	3000	18	5090	4650
440/65 R 24	135 D	W13L W14L W15L	441 17.4	1182 46.5	540 21	3501 137.8	1.3	1830	1880	1740	1670	1590	1.25	2700	2460
							19	4030	4140	3830	3680	3500	24	5950	5420
							1.6	2070	2130	1970	1890	1800	2	3060	2790
							23	4560	4690	4340	4160	3960	29	6740	6150
440/65 R 24	135 D	W13L W14L W15L	441 17.4	1182 46.5	540 21	3501 137.8	1.8	2120	2180	2010	1930	1840	2.25	3130	2850
							26	4670	4800	4430	4250	4050	33	6890	6280
							2	2250	2320	2150	2060	1960	2.5	3330	3040
							29	4960	5110	4740	4540	4320	36	7330	6700
440/65 R 24	135 D	W13L W14L W15L	441 17.4	1182 46.5	540 21	3501 137.8	2.2	2380	2450	2270	2170	2070	2.75	3520	3210
							32	5240	5400	5000	4680	4560	40	7750	7070
							2.4	2510	2580	2390	2290	2180	3	3710	3380
							35	5530	5680	5260	5040	4800	44	8170	7440
480/65 R 24	133 D	W15L W14L	480 18.9	1234 48.6	558 22	3644 143.5	0.8	1580	1620	1500	1440	1370	1	2330	2120
							12	3480	3570	3300	3170	3020	15	5130	4670
							1	1790	1850	1710	1640	1560	1.25	2650	2420
							15	3940	4070	3770	3610	3440	18	5840	5330
480/65 R 24	133 D	W15L W14L	480 18.9	1234 48.6	558 22	3644 143.5	1.3	2090	2160	1990	1910	1820	1.63	3090	2820
							19	4600	4760	4380	4210	4010	24	6810	6210
							1.6	2370	2440	2260	2160	2060	2	3500	3190
							23	5220	5370	4980	4760	4540	29	7710	7030
480/65 R 24	140 D	W15L W14L	480 18.9	1234 48.6	558 22	3644 143.5	1.8	2440	2510	2320	2230	2120	2.25	3600	3290
							26	5370	5530	5110	4910	4670	33	7930	7250
							2	2590	2670	2460	2360	2250	2.5	3830	3490
							29	5700	5880	5420	5200	4960	36	8440	7690
480/65 R 24	140 D	W15L W14L	480 18.9	1234 48.6	558 22	3644 143.5	2.2	2740	2820	2610	2500	2380	2.75	4050	3690
							32	6040	6210	5750	5510	5240	40	8920	8130
							2.4	2880	2960	2740	2630	2500	3	4250	3880
							35	6340	6620	6040	5790	5510	44	9360	8550
540/65 R 24	146 D	W16L W18L	550 21.7	1312 51.7	590 23	3860 152	0.8	1820	1870	1730	1660	1580	1	2690	2450
							12	4010	4120	3810	3660	3480	15	5930	5400
							1	2070	2130	1970	1890	1800	1.25	3060	2790
							15	4560	4690	4340	4160	3960	18	6740	6150
540/65 R 24	146 D	W16L W18L	550 21.7	1312 51.7	590 23	3860 152	1.3	2420	2490	2300	2210	2100	1.625	3570	3260
							19	5330	5480	5070	4870	4630	24	7860	7180
							2.4	3450	3560	3290	3150	3000	3	5100	4650
							35	7600	7840	7250	6940	6610	44	11230	10240

These are tubeless tyres



Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	Infl. Press.	Speed				kmph mph		Infl. Press.	Speed	kmph mph
			SW	OD				Field Operations	Non-Cyclic Operations				Cyclic Operations			
									25	40	50	65	10		15	
									16	25	31	40	6		9	
mm in	mm in	mm in	mm in	bar psi	Maximum Load				kg lbs	bar psi	Recom. Load	kg lbs				

R 28		Size	LI/SS	Rim	SW	OD	SLR	RC	Infl. Press.	Speed				kmph mph		Infl. Press.	Speed	kmph mph
Field Operations	Non-Cyclic Operations									Cyclic Operations								
	25									40	50	65	10	15				
	16									25	31	40	6	9				
mm in	mm in	mm in	mm in	bar psi	Maximum Load				kg lbs	bar psi	Recom. Load	kg lbs						
440/65 R 28	138 D	W13 W14L W15L	441 17.4	1283 50.5	587 23.1	3819 150.3	1.8	2290	2360	2180	2090	1990	2.3	3380	3080			
							26	5040	5200	4800	4600	4380	33	7740	6780			
							2.0	2440	2510	2320	2230	2120	2.5	3600	3290			
							29	5370	5530	5110	4910	4670	36	7930	7250			
480/65 R 28	136 D	W15L W14L	479 18.8	1335 52.5	656 25.8	4068 160.1	2.2	2580	2650	2450	2350	2240	2.8	3810	3470			
							32	5680	5840	5400	5180	4930	40	8390	7640			
							2.4	2710	2800	2580	2480	2360	3	4010	3660			
							35	5970	6170	5680	5460	5200	44	8830	8060			
480/65 R 28	142 D	W15L W14L	480 18.9	1335 52.6	608 23.9	3962 156.0	0.8	1710	1770	1630	1560	1490	1	2530	2310			
							12	3770	3900	3590	3440	3280	15	5570	5090			
							1	1960	2010	1860	1790	1700	1.25	2890	2640			
							15	4320	4430	4100	3940	3740	18	6370	5810			
480/65 R 28	142 D	W15L W14L	480 18.9	1335 52.6	608 23.9	3962 156.0	1.3	2280	2350	2170	2080	1980	1.63	3370	3070			
							19	5020	5180	4780	4580	4360	24	7420	6760			
							1.6	2580	2650	2450	2350	2240	2	3810	3470			
							23	5680	5840	5400	5180	4930	29	8390	7640			
540/65 R 28	142 D	W16L W18L	550 21.7	1413 55.6	640 25.2	4178 164.5	1.8	2580	2650	2450	2350	2240	2.25	3810	3470			
							26	5680	5840	5400	5180	4930	33	8390	7640			
							2.0	2740	2820	2610	2500	2380	2.50	4050	3690			
							29	6040	6210	5750	5510	5240	36	8920	8130			
540/65 R 28	142 D	W16L W18L	550 21.7	1413 55.6	640 25.2	4178 164.5	2.2	2900	2990	2760	2650	2520	2.75	4280	3910			
							32	6390	6590	6080	5840	5550	40	9430	8610			
							2.4	3050	3140	2900	2780	2650	3	4510	4110			
							35	6720	6920	6390	6120	5840	44	9930	9050			
540/65 R 28	149 D	W16L W18L	550 21.7	1413 55.6	640 25.2	4178 164.5	0.8	2040	2100	1940	1860	1770						
							12	4490	5630	4270	4100	3900						
							1	2320	2390	2210	2120	2020	1.25	3430	3130			
							15	5110	5260	4870	4670	4450	18	7560	6890			
540/65 R 28	149 D	W16L W18L	550 21.7	1413 55.6	640 25.2	4178 164.5	1.3	2700	2780	2570	2470	2350	1.625	4000	3640			
							19	5950	6120	5660	5440	5180	24	8810	8020			
							1.6	3050	3140	2900	2780	2650	2	4510	4110			
							23	6720	6920	6390	6120	5840	29	9930	9050			
540/65 R 28	149 D	W16L W18L	550 21.7	1413 55.6	640 25.2	4178 164.5	1.4	2730	2810	2600	2490	2370	1.75	4030	3670			
							20	6010	6190	5730	5480	5220	25	8880	8080			
							1.6	2940	3030	2800	2690	2560	2	4350	3970			
							23	6480	6670	6170	5930	5640	29	9580	8740			
540/65 R 28	149 D	W16L W18L	550 21.7	1413 55.6	640 25.2	4178 164.5	2.0	3360	3460	3200	3070	2920	2.5	4960	4530			
							29	7400	7620	7050	6760	6430	36	10930	9980			
							2.4	3740	3850	3560	3410	3250	3	5530	5040			
							35	8240	8480	7840	7510	7160	44	12180	11100			

These are tubeless tyres





Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	Infl. Press.	Speed				kmph	Infl. Press.	Speed	kmph				
			SW	OD				mm in	mm in	bar psi	Non-Cyclic Operations				bar psi	Cyclic Operations			
											Field Operations	25		40		50	65	10	15
												16		25		31	40	6	9
mm in	mm in	mm in	mm in	bar psi	Maximum Load				kg lbs	Recom. Load	kg lbs								

R 30															
540/65 R 30	143 D	W16L W18L	550 21.7	1464 57.6	666 26	4338 170.8	0.8	2090	2160	1990	1910	1820	1	3090	2820
							12	4600	4760	4380	4210	4010	15	6810	6210
							1	2380	2450	2270	2170	2070	1.25	3520	3210
							15	5240	5400	5000	4780	4560	18	7750	7070
540/65 R 30	150 D	W16L W18L	550 21.7	1464 57.6	666 26	4338 170.8	1.3	2770	2860	2640	2530	2410	1.625	4100	3740
							19	6100	6300	5810	5570	5310	24	9030	8240
							1.6	3130	3230	2980	2860	2725	2	4630	4220
							23	6890	7110	6560	6300	6000	29	10200	9300
540/65 R 30	150 D	W16L W18L	550 21.7	1464 57.6	666 26	4338 170.8	0.8	2020	2090	1930	1850	1760	1	2990	2730
							12	4450	4600	4250	4070	3880	15	6590	6010
							1	2310	2380	2200	2110	2010	1.25	3420	3120
							15	5090	5240	4850	4650	4430	18	7530	6870
540/65 R 30	150 D	W16L W18L	550 21.7	1464 57.6	666 26	4338 170.8	1.3	2690	2770	2560	2460	2340	1.625	3980	3630
							19	5930	6100	5640	5420	5150	24	8770	8000
							2.4	3850	3970	3670	3520	3350	3	5700	5190
							35	8480	8740	8080	7750	7380	44	12560	11430
R 34															
540/65 R 34	145 D	W16L W18L	550 21.7	1566 61.7	717 28	4659 183.4	0.8	2220	2290	2110	2030	1930	1	3280	2990
							12	4890	5040	4650	4470	4250	15	7220	6590
							1	2530	2610	2410	2310	2200	1.25	3740	3410
							15	5570	5750	5310	5090	4850	18	8240	7510
540/65 R 34	145 D	W16L W18L	550 21.7	1566 61.7	717 28	4659 183.4	1.3	2960	3050	2810	2700	2570	1.625	4370	3980
							19	6520	6720	6190	5950	5660	24	9630	8770
							1.6	3340	3440	3180	3050	2900	2	4930	4500
							23	7360	7580	7000	6720	6390	29	10860	9910
540/65 R 34	152 D	W16L W18L	550 21.7	1566 61.7	717 28	4659 183.4	0.8	2150	2220	2050	1960	1870	1	3180	2900
							12	4740	4890	4520	4320	4120	15	7000	6390
							1	2450	2520	2330	2240	2130	1.3	3620	3300
							15	5400	5550	5130	4930	4690	18	7970	7270
540/65 R 34	152 D	W16L W18L	550 21.7	1566 61.7	717 28	4659 183.4	1.3	2850	2940	2720	2600	2480	1.6	4220	3840
							19	6280	6480	5990	5730	5460	24	9300	8460
							2.4	4080	4210	3890	3730	3550	3	6040	5500
							35	8990	9270	8570	8220	7820	44	13300	12110
600/65 R 34	151 D	DW20B W18L	600 23.6	1644 64.7	748 29.4	496 193.5	0.8	2650	2730	2520	2420	2300	1	3910	3570
							12	5840	6010	5550	5330	5070	15	8610	7860
							1	3010	3100	2870	2750	2620	1.25	4450	4060
							15	6630	6830	6320	6060	5770	18	9800	8940
600/65 R 34	151 D	DW20B W18L	600 23.6	1644 64.7	748 29.4	496 193.5	1.3	3520	3630	3350	3210	3060	1.63	5200	4740
							19	7750	8000	7380	7070	6740	24	11450	10440
							1.6	3970	4090	3780	3620	3450	2	5870	5350
							23	8740	9010	8330	7970	7600	29	12930	11780

These are tubeless tyres



Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	Infl. Press.	Speed				Infl. Press.	Speed	kmph	
			SW	OD				Field Operations	Non-Cyclic Operations				Cyclic Operations		
									25	40	50		65	10	15
									16	25	31		40	6	9
mm in	mm in	mm in	mm in	bar psi	Maximum Load		kg lbs	bar psi	Recom. Load	kg lbs					

R 38

600/65 R 34	157 D	DW20B W18L	600 23.6	1644 64.7	748 29.4	4916 193.5	1.8 26	4010 8830	4140 9120	3820 8410	3660 8060	3490 7690	2.3 33	5930 13060	5410 11920
							2.0 29	4270 9410	4400 9690	4060 8940	3900 8590	3710 8170	2.5 36	6310 13900	5750 12670
							2.2 32	4510 9930	4650 10240	4290 9450	4120 9070	3920 8630	2.8 40	6660 14670	6080 13390
							2.4 35	4740 10440	4890 10770	4520 9960	4330 9540	4125 9090	3 44	7010 15440	6390 14070
540/65 R 38	147 D	W16L W18L	550 21.7	1667 65.6	767 30	4975 196	0.8 12	2350 5180	2420 5330	2230 4910	2140 4710	2040 4490	1 15	3470 7640	3160 6960
							1 15	2680 5900	2760 6080	2550 5620	2450 5400	2330 5130	1.25 18	3960 8720	3610 7950
							1.3 19	3130 6890	3220 7090	2980 6560	2860 6300	2720 5990	1.625 24	4620 10180	4220 9300
							1.6 23	3540 7800	3640 8020	3370 7420	3230 7110	3075 6770	2 29	5230 11520	4770 10510
540/65 R 38	153 D	W16L W18L	550 21.7	1667 65.6	767 30	4975 196	1.8 26	3540 7800	3650 8040	3370 7420	3230 7110	3080 6780	2.25 33	5240 11540	4770 10510
							2.0 29	3770 8300	3890 8570	3590 7910	3440 7580	3280 7220	2.5 36	5580 12290	5080 11190
							2.2 32	3990 8790	4110 9050	3800 8370	3640 8020	3470 7640	2.8 40	5900 13000	5380 11850
							2.4 35	4200 9250	4330 9540	4000 8810	3830 6440	3650 8040	3 44	6210 13680	5660 12470
600/65 R 38	153 D	DW20B W18L	600 23.6	1745 68.7	798 31.4	5236 206.2	0.8 12	2790 6150	2880 6340	2660 5860	2550 5620	2430 5350	1 15	4130 9100	3770 8300
							1 15	3190 7030	3280 7220	3030 6670	2910 6410	2770 6100	1.25 18	4710 10370	4290 9450
							1.3 19	3710 8170	3830 8440	3540 7800	3390 7470	3230 7110	1.625 24	5490 12090	5010 11040
							1.6 23	4200 9250	4330 9540	4000 8810	3830 8440	3650 8040	2 29	6210 13680	5660 12470
650/65 R 38	157 D	DW20B	645 25.4	1811 216.1	825 32.5	5489 216.1	0.8 12	3160 6960	3260 7180	3010 6630	2890 6370	2750 6060			
							1 15	3600 7930	3710 8170	3430 7560	3290 7250	3130 6890	1.25 18	5320 11720	4850 10680
							1.3 19	4200 9250	4330 9540	4000 8810	3830 8440	3650 8040	1.625 24	6210 13680	5660 12470
							1.6 23	4740 10440	4890 10770	4520 9960	4330 9540	4125 9090	2 29	7010 15440	6390 14070

These are tubeless tyres



Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	Infl. Press.	Speed				Infl. Press.	Speed	kmph			
			SW	OD				mm in	mm in	bar psi	Non-Cyclic Operations				Cyclic Operations		
											25		40	50	65	10	15
											16		25	31	40	6	9
			mm in	mm in				mm in	mm in	bar psi	Maximum Load		kg lbs		bar psi	Recom. Load	kg lbs

650/65 R 38	163 D	DW20B	645 25.4	1811 71.3	825 32.5	5489 216.1	1.4	4080	4210	3890	3730	3550	1.75	6040	5500
							20	8990	9270	8570	8220	7820	25	13300	12110
							1.6	4420	4550	4200	4030	3840	2	6530	5950
							23	9740	10020	9250	8880	8460	29	14380	13110
650/65 R 42	158 D	DW20B W18L	645 25.3	1913 75.31	888 34.9	5830 229.5	2.0	5040	5190	4800	4600	4380	2.5	7450	6790
							29	11100	11430	10570	10130	9650	36	16410	14960
							2.4	5610	5780	5340	5120	4875	3	8290	7560
							35	12360	12730	11760	11280	10740	44	18260	16650
R 42 650/65 R 42	165 D	DW20B W18L	645 25.4	1913 75.3	885 34.8	5778 227.5	0.8	3250	3350	3100	2970	2830	1	4810	4390
							12	7160	7380	6830	6540	6230	15	10590	9670
							1	3710	3830	3540	3390	3230	1.25	5490	5010
							15	8170	8440	7800	7470	7110	18	12090	11040
650/65 R 42	165 D	DW20B W18L	645 25.4	1913 75.3	885 34.8	5778 227.5	1.3	4320	4460	4120	3950	3760	1.63	6390	5830
							19	9520	9820	9070	8700	8280	24	14070	12840
							1.6	4890	5040	4650	4460	4250	2	7230	6590
							23	10770	11100	10240	9820	9360	29	15930	14520
650/65 R 42	165 D	DW20B W18L	645 25.4	1913 75.3	885 34.8	5778 227.5	1.8	4990	5140	4750	4560	4340	2.25	7380	6730
							26	10990	11320	10460	10040	9560	33	16260	14820
							2	5310	5470	5060	4850	4620	2.50	7850	7160
							29	11700	12050	11150	10680	10180	36	17290	15770
650/65 R 42	165 D	DW20B W18L	645 25.4	1913 75.3	885 34.8	5778 227.5	2.2	5620	5790	5350	5130	4890	2.75	8310	7580
							32	12380	12750	11780	11300	10770	40	18300	16700
650/65 R 42	165 D	DW20B W18L	645 25.4	1913 75.3	885 34.8	5778 227.5	2.4	5920	6100	5640	5410	5150	3	8760	7980
							35	13040	13440	12420	11920	11340	44	19300	17580

These are tubeless tyres



# ROW CROP AGRI RADIAL

WITH THE POWER OF CTR\*

## FEATURE

- Higher angle and lug overlap at centre

## BENEFIT

- Better roadability and stability

## FEATURE

- Rounded shoulder

## BENEFIT

- Reduced crop damage

## FEATURE

- Higher number of lugs

## BENEFIT

- Superior traction

## FEATURE

- Strong carcass and bead

## BENEFIT

- Higher load carrying capacity

## FEATURE

- D-rated (65 kmph) tyres

## BENEFIT

- Improved transportation speed



\*CTR-Low Compaction, High Traction, High Roadability



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Field	10	25	40	50	65
			mm in	mm in	mm in	mm in		bar psi	Maximum Load		kg lbs		

**ROW CROP**

R 42		320/80 R 42 (12.4 R 42)	141 A8/B	W10	320 12.6	1580 62.2	744 29.3	4688 184.6	1.2	3340	2180	1780	1550	1450	-						
															17	7360	4800	3920	3410	3190	-
															1.6	3960	2580	2120	1840	1720	-
															23	8720	5680	4670	4050	3790	-
								2.4	5010	3270	2680	2330	2180	-							
								35	11040	7200	5900	5130	4800	-							
								<b>3.2</b>	5920	3860	3170	2760	<b>2575</b>	-							
								46	13040	8500	6980	6080	5670	-							
R 46		380/90 R 46 (14.9 R 46)	165 A8/B	W11 W12 W13	380 15.0	1852 72.9	864 34.0	5466 215.2	3.5	4910	6410	5120	4270	4270	-						
															51	10810	14120	11280	9410	9410	-
															4	5310	6930	5540	4620	4620	-
															58	11700	15260	12200	10180	10180	-
								4.4	5620	7340	5870	4890	4890	-							
								64	12380	16170	12930	10770	10770	-							
								<b>4.8</b>	5920	7730	6180	<b>5150</b>	5150	-							
								70	13040	17030	13610	<b>11340</b>	11340	-							
		300/95 R 46 (12.4 R 46)	143 D 146 A8	W9 W10	300 11.8	1738 68.4	817 32.1	5155 203	2.4	2470	3230	2550	2370	2260	2150						
															35	5440	7110	5620	5220	4980	4740
															2.8	2700	3530	2780	2590	2470	2350
															41	5950	7780	6120	5700	5440	5180
								3.2	2920	3810	3010	2790	2670	2540							
								46	6430	8390	6630	6150	5880	5590							
								<b>3.6</b>	3130	4090	3230	<b>3000</b>	2860	<b>2725</b>							
								<b>52</b>	6890	9010	7110	<b>6610</b>	6300	<b>6000</b>							
		300/95 R 46 (12.4 R 46)	148 D 151 A8	W9 W10	300 11.8	1738 68.4	817 32.2	5155 203	2.4	2690	3510	2770	2560	2460	2340						
															35	5930	7730	6100	5640	5420	5150
															2.8	2940	3840	3030	2800	2690	2560
															41	6480	8460	6670	6170	5930	5640
								3.6	3400	4440	3510	3240	3110	2960							
								52	7490	9780	7730	7140	6850	6520							
								<b>4</b>	3620	4730	3730	<b>3450</b>	3310	<b>3150</b>							
								<b>58</b>	7970	10420	8220	<b>7600</b>	7290	<b>6940</b>							
R 48		230/95 R 48 (9.5 R 48)	136D 139A8	W7 W8	228 8.97	1657 65.23	785 30.9	5049 198.7	2.8	2090	2730	2160	1990	1910	1820						
															41	4600	6010	4760	4380	4210	4010
															3.2	2270	2960	2330	2160	2070	1970
															46	5000	6520	5130	4760	4560	4340
								3.6	2430	3170	2500	2310	2220	2110							
								52	5350	6980	5510	5090	4890	4650							
								<b>4</b>	2580	3360	2650	2450	2350	<b>2240</b>							
								58	5680	7400	5840	5400	5180	4930							

These are tubeless tyres



Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Field	10	25	40	50	65
			mm in	mm in	mm in	mm in		mm in	mm in	bar psi	Maximum Load		kg lbs

R 48							2.4	2390	3120	2460	2280	2180	2080
270/95 R 48 (11.2 R 48)	142D 145A8	W9 W8 W10	275 10.83	1733 68.23	816 32.13	5281 207.9	35	5260	6870	5420	5020	4800	4580
							2.8	2620	3420	2700	2500	2390	2280
							41	5770	7530	5950	5510	5260	5020
							3.2	2840	3710	2930	2700	2590	2470
46	6260	8170	6450	5950	5700	5440							
<b>3.6</b>	3050	3980	3140	<b>2900</b>	2780	<b>2650</b>							
52	6720	8770	6920	6390	6120	5840							
340/85 R 48	148D 151A8	W12 W11	343 13.5	1797 70.7	841 33.1	5476 215.5	2.4	2860	3740	2950	2730	2610	2490
							35	6300	8240	6500	6010	5750	5480
							2.8	3130	4080	3220	2980	2860	2720
							41	6890	8990	7090	6560	6300	5990
3.2	3380	4410	3480	3220	3090	2940							
46	7440	9710	7670	7090	6810	6480							
<b>3.6</b>	3620	4730	3730	<b>3450</b>	3310	<b>3150</b>							
52	7970	10420	8220	7600	7290	6940							

These are tubeless tyres





# TRACTOR BIAS





# FARMAX R1

## FEATURE

- Triple angle lug

## BENEFIT

- Enhanced traction and roadability

## FEATURE

- Reinforced carcass

## BENEFIT

- Longer service life

## FEATURE

- High centre lug overlap and tie bar

## BENEFIT

- Improved stability





# FARMAX R1

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in				kmph mph	kg lbs
8.3-24	8	TT	105 A8	W7	209 8.2	994 39.1	465 18.3	2982 117.4	3.1 45	40 25	925 2040
9.5-24	8	TT	112 A8	W8	241 9.5	1050 41.3	491 19.3	3150 124.0	2.8 41	40 25	1120 2470
11.2-24	8	TT	116 A8	W10	282 11.1	1103 43.4	516 20.3	3309 130.3	2.4 35	40 25	1250 2755
12.4-24	8	TT	121 A8	W11	307 12.1	1159 45.6	542 21.4	3477 136.9	2.3 33	40 25	1415 3120
13.6-24	8	TT	122 A8	W12	345 13.6	1210 47.6	560 22.0	3555 140.0	1.9 28	40 25	1500 3300
14.9-24	8	TT	128 A8	W13	402 15.8	1275 50.2	597 23.5	3825 150.6	1.8 26	40 25	1800 3970
16.9-24	8	TT	133 A8	W15L	426 16.8	1330 52.4	622 24.5	3990 157.1	1.7 25	40 25	2040 4495
18.4-26	12	TT	146 A8	W16L	492 19.4	1480 58.3	693 27.3	4440 174.8	2.3 33	40 25	3000 6615
11.2-28	8	TT	118 A8	W10	295 11.6	1205 47.4	564 22.2	3615 142.3	2.5 36	40 25	1320 2910
12.4-28	8	TT	123 A8	W11	323 12.7	1258 49.5	589 23.2	3774 148.6	2.4 35	40 25	1550 3415



Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
13.6-28	8	TT	125 A8	W12	343 13.5	1310 51.6	613 24.1	3930 154.7	2 29	40 25	1650 3638
14.9-28	8	TT	130 A8	W13	386 15.2	1375 54.1	644 25.3	4125 162.4	1.8 26	40 25	2070 4565
16.9-28	12	TT	143 A8	W15L	429 16.9	1435 56.5	672 26.4	4305 169.5	2.4 35	40 25	2725 6010
16.9-30	10	TT	140 A8	W15L	440 17.3	1495 58.9	700 27.5	4485 176.6	2 29	40 25	2455 5410
18.4-30	12	TT	149 A8	W16L	465 18.3	1564 61.6	732 28.8	4692 184.7	2.3 33	40 25	3250 7165
18.4-34	8	TT	142 A8	W16L	465 18.3	1650 65.0	772 30.4	4950 194.9	1.4 20	40 25	2650 5840
	12	TT	150 A8						2.3 33	40 25	3450 7605
13.6-36	8	TT	129 A8	W12	350 13.8	1535 60.4	718 28.3	4605 181.3	2 29	40 25	1855 4090
13.6-38	8	TT	131 A8	W12	350 13.8	1585 62.4	742 29.2	4755 187.2	2 29	40 25	1950 4300
15.5-38	8	TT	133 A8	W14	400 15.7	1577 62.1	738 29.1	4731 186.3	1.8 26	40 25	2060 4540
	10	TT	137 A8						2.3 33	40 25	2300 5070
16.9-38	8	TT	141 A8	W15L	429 16.9	1685 66.3	789 31.0	5055 199.0	1.7 25	40 25	2575 5675
	10	TT	143 A8						2.0 29	40 25	2725 6010
18.4-38	8	TT	143 A8	W16L	465 18.3	1750 68.9	819 32.2	5250 206.7	1.4 20	40 25	2725 6010
	12	TT	152 A8						2.3 33	40 25	3550 7825



# FARMAX F2M

## FEATURE

- Multi rib design

## BENEFIT

- Easy steering

## FEATURE

- Cut-resistant compound


## BENEFIT

- Improved tire life



# FARMAX F2M

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max load
					mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs
10.00-16	8	TL	110 A8	W8L	274 10.8	894 35.2	402 15.8	2682 105.6	3.0 44	40 25	1060 2335
11.00-16	8	TL	114 A8	W8L	315 12.4	967 38.1	435 17.1	2901 114.2	2.8 40	40 25	1180 2600

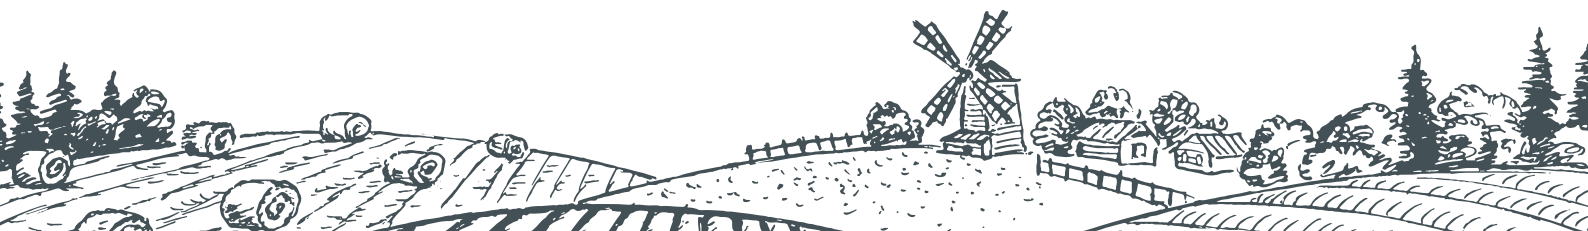

# FLOTATION



# FLOATMAX FT AGRI RADIAL

WITH THE POWER OF CTR\*

## FEATURE

- Directional lug

## BENEFIT

- Superior traction

## FEATURE

- Robust centre blocks

## BENEFIT

- Better stability and roadability



## FEATURE

- Higher rubber mass

## BENEFIT

- Longer life

## FEATURE

- Rounded shoulder

## BENEFIT

- Lesser damage to soil and crop

## FEATURE

- Wider and flatter crown

## BENEFIT

- Better floating characteristics

\*CTR-Low Compaction, High Traction, High Roadability





Size	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Speed			kmph mph		
			SW	OD				Static	10	30	40	50	65
			mm in	mm in	mm in	mm in			bar psi	Recommended Load		kg lbs	

**FLOATMAX FT**

R 30							Infl. Press.	Static	10	30	40	50	65
560/45 R 22.5	152 D	AG16.00	543 21.4	1076 42.4	493 19.4	3279 129.1	1.2	4030	3150	2640	2380	2120	1750
							17	8880	6940	5810	5240	4670	3850
							1.6	4760	3730	3130	2820	2500	2070
							23	10480	8220	6890	6210	5510	4560
							2.4	6050	4730	3970	3580	3180	2630
							35	13330	10420	8740	7890	7000	5790
							2.8	6620	5180	4350	3920	3480	2880
41	14580	11410	9580	8630	7670	6340							
3.6	7680	6010	5040	4540	4040	3340							
52	16920	13240	11100	10000	8900	7360							
<b>4</b>	8170	6390	5360	4830	4300	<b>3550</b>							
<b>58</b>	18000	14070	11810	10640	9470	<b>7820</b>							
600/55 R 26.5	165 D	AG20.00	620 24.4	1336 52.6	608 24	4050 159.5	1.2	5840	4570	3840	3450	3070	2540
							17	12860	10070	8460	7600	6760	5590
							1.6	6920	5420	4550	4090	3640	3010
							23	15240	11940	10020	9010	8020	6630
							2.4	8790	6880	5770	5200	4620	3820
							35	19360	15150	12710	11450	10180	8410
							2.8	9610	7520	6310	5680	5060	4180
41	21170	16560	13900	12510	11150	9210							
3.6	11130	8710	7310	6580	5860	4840							
52	24520	19190	16100	14490	12910	10660							
<b>4</b>	11850	9270	7780	7000	6230	<b>5150</b>							
<b>58</b>	26100	20420	17140	15420	13720	11340							

These are tubeless tyres





# FLOTATION T422



## FEATURES

- Tough nylon casing
- Strong bead bundle

## BENEFIT

- High load carrying capability

## FEATURE

- Rounded shoulder

## BENEFIT

- Reduced damage to crops

## FEATURE

- Larger volume and footprint

## BENEFIT

- Reduced compaction



# FLOTATION T422

Size	PR	Type	L/SS		Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity		
						SW	OD				Max Speed	Max Load	
			Free Rolling	Drive Wheel		mm in	mm in					mm in	mm in
500/50-17	16	TL	152 A8 149 B	140 A8 136 B	16.00DC	500 19.7	932 37.0	436 17.0	2796 110.0	3.2 46	40	3550	2500
	18	TL	157 A8 154 B	145 A8 141 B							25	7820	5510
500/60-22.5	16	TL	163 A8 159 B	151 A8 148 B	16.00DC	500 19.7	1170 46.1	510 20.1	3380 133.1	3.2 46	40 25	4875 10750	3450 7605
550/45-22.5	16	TL	159 A8 156 B	147 A8 143 B	16.00DC	550 21.7	1070 42.1	470 18.5	3205 126.2	2.8 41	40	4375	3075
	20	TL	166 A8 163 B	154 A8 150 B							25	9645	6780
550/60-22.5	16	TL	168 A8 163 B	155 A8 151 B	16.00DC	550 21.7	1238 48.7	540 21.3	3720 146.5	3 44	40 25	5600 12345	3875 8545
600/50-22.5	16	TL	165 A8 161 B	153 A8 149 B	20.00DC	600 23.6	1170 46.1	510 20.1	3498 137.7	2.6 38	40 25	5150 11355	3650 8045
600/55-22.5	16	TL	169 A8 166 B	156 A8 153 B	20.00DC	600 23.6	1238 48.7	540 21.3	3715 146.3	2.6 38	40 25	5800 12785	4000 8815
700/40-22.5	16	TL	166 A8 162 B	154 A8 150 B	24.00DC	700 27.6	1170 46.1	510 20.1	3522 138.7	2.2 32	40 25	5300 11685	3750 8265
700/50-22.5	16	TL	174 A8 170 B	162 A8 158 B	24.00DC	700 27.6	1245 49.0	550 21.7	3710 146.1	2.8 41	40 25	6700 14770	4750 10470
600/55-26.5	16	TL	170 A8 167 B	159 A8 156 B	20.00DC	600 23.6	1333 52.5	585 23.0	3986 156.9	2.6 38	40 25	6000 13230	4375 9645
700/50-26.5	16	TL	174 A8 170 B	162 A8 158 B	24.00DC	700 27.6	1333 52.5	585 23.0	3986 156.9	2.4 35	40 25	6700 14770	4750 10470
800/45-26.5	12	TL	170 A8 167 B	158 A8 155 B	28.00DC	800 31.5	1355 53.3	585 23.0	4016 158.1	1.7 25	40	6000	4250
	16	TL	177 A8 173 B	164 A8 160 B							25	13230	9370
										2.2 32	40 25	7300 16095	5000 11025



# T422 VALUE PRO

**FEATURE**

- Rounded shoulder

**BENEFIT**

- Reduced damage to crops

**FEATURE**

- Larger volume and footprint

**BENEFIT**

- Reduced compaction

\*Designed for free-rolling applications



# T422 VALUE PRO

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity		
						SW	OD				Max Speed	Max Load	
			Free Rolling	Drive Wheel		mm in	mm in	kmph mph	kg lbs	kg lbs			
500/60-22.5	16	TL	163 A8 159 B	151 A8 148 B	16.00DC	500 19.7	1170 46.1	510 20.1	3490 137.4	3.2 46	40 25	4875 10750	3450 7605
550/45-22.5	16	TL	159 A8 156 B	147 A8 143 B	16.00DC	550 21.7	1070 42.1	475 18.7	3200 126.0	2.8 41	40 25	4375 9645	3075 6780
550/60-22.5	16	TL	168 A8 163 B	155 A8 151 B	16.00DC	550 21.7	1240 48.8	540 21.3	3720 146.5	3 44	40 25	5600 12345	3875 8540



# TR800



## FEATURE

- Rounded shoulder

## BENEFIT

- Reduced damage to crops

## FEATURE

- Larger volume and footprint

## BENEFIT

- Reduced compaction

# TR800

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity		
						SW	OD				Max Speed	Max Load	
			Free Rolling	Drive Wheel		mm in	mm in	mm in	mm in	bar psi		kmph mph	kg lbs
400/60-15.5	14	TL	145 A8	132 A8	13.00	400	876	385	2575	3.6 52	40 25	2900 6395	2000 4410
	18	TL	149 A8	137 A8		15.7	34.5	15.2	101.4	4.5 65	40 25	3250 7165	2300 5070



# FLOTATION PLUS



**FEATURE**

- Rounded shoulder

**BENEFIT**

- Reduced damage to crops

**FEATURE**

- Larger volume and footprint

**BENEFIT**

- Reduced compaction

\*Designed for steering and drive wheel applications

# FLOTATION PLUS

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity		
						SW	OD				Max Speed	Max Load	
			mm in	mm in		Free Rolling	Drive Wheel						
			Free Rolling	Drive Wheel		mm in	mm in	mm in	mm in	bar psi	kmph mph	kg lbs	kg lbs
480/45-17	16	TL	146 A8	134 A8	16.00DC	490 19.3	866 34.1	405 16.0	2598 102.3	3.2 46	40 25	3000 6615	2120 4675
500/50-17	14	TL	149 A8	137 A8	16.00DC	500 19.7	950 37.4	445 17.5	2850 112.2	2.8 41	40 25	3250 7165	2240 4940



# FLOTATION TX440



## FEATURE

- Rounded shoulder

## BENEFIT

- Reduced damage to crops

## FEATURE

- Larger volume and footprint

## BENEFIT

- Reduced compaction

\*Designed for on and off-road agricultural service

## FLOTATION TX440

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity		
			Free Rolling	Drive Wheel		SW	OD				Max Speed	Max Load	
												Free Rolling	Drive Wheel
						mm in	mm in				mm in	mm in	bar psi
500/60-22.5	16	TL	163 A8	151 A8	16.00DC	500 20	1170 46	510 20	3385 133	3.2 46	40 25	4875	3450
			159 B	148 B								10750	7605
550/60-22.5	16	TL	166 A8	154 A8	16.00DC	550 22	1244 49	541 21	3597 142	2.8 41	40 25	5300	3750
			162 B	150 B								11685	8265
600/50-22.5	16	TL	165 A8	153 A8	20.00DC	611 24	1170 46	510 20	3472 137	2.6 38	40 25	5150	3650
			161 B	149 B								11355	8045
700/40-22.5	16	TL	166 A8	154 A8	24.00DC	700 28	1170 46	512 20	3490 137	2.2 32	40 25	5300	3750
			162 B	150 B								11685	8265





# IRROGATOR



# IRROGATOR

## FEATURE

- Strong nylon casing

## BENEFIT

- Excellent stability and increased service life



## FEATURE

- Optimised lug angle with lug overlap


## BENEFIT

- Uniform wear

# IRROGATOR

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLR	RC	Infl. Press.	Load Capacity	
					SW	OD				Max Speed	Max Load
					mm in	mm in				kmph mph	kg lbs
*11.2-24	4	TT	110 A6	W10	284 11.2	1105 43.5	517 20.4	3315 130.5	1.8 26	30 19	1060 2335
14.9-24	8	TT	123 A6	W13	398 15.7	1245 49.0	575 22.6	3660 144.1	1.4 20	30 19	1550 3410
11.2-38	6	TT	117 A6	W10	284 11.2	1445 56.9	685 27.0	4250 167.3	1.8 26	30 19	1285 2830

\*This is a separate pattern from the one shown

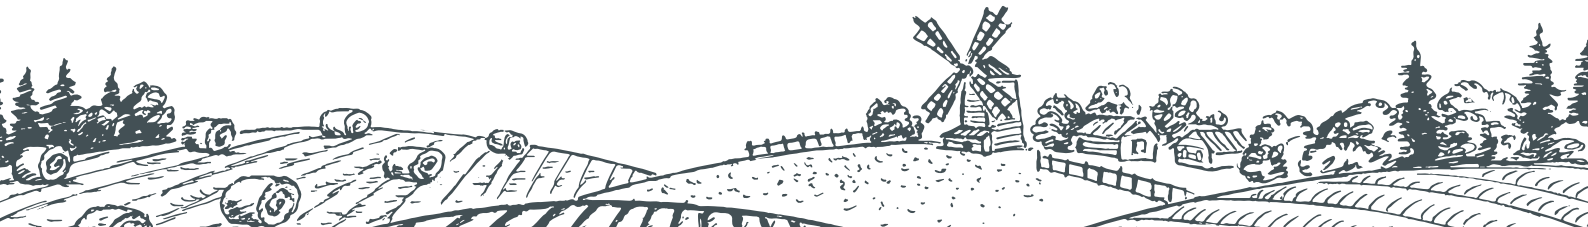



# AGRO INDUSTRIAL/MULTI-USE



# LIFT PRO

**FEATURE**

- Unique R1 pattern

**BENEFIT**

- excellent traction

**FEATURE**

- Deep under tread

**BENEFIT**

- Improved puncture resistance

**FEATURE**

- Strong nylon casing and thick sidewall

**BENEFIT**

- High radial and lateral stability

\* Designed for tele-handlers for agro-industrial use



# LIFT PRO

Size	PR	Type	LI/SS		Rim	Unloaded Dimension		SLR	RC	RCI	Infl. Press.	Load Capacity		
						SW	OD					Free Rolling	Drive Wheel	
			mm in	mm in		mm in	mm in				bar psi			kmph mph
15.5/80-24	16	TL	163 A6	151 A6	W13	395 15.5	1250 49.2	562 21.5	3650 143.7	38	4 58	30 19	4875 10745	3450 7600

Size	LI/SS	Rim	Unloaded Dimensions		SLR	RC	NSD	Tire Wt.	Infl. Press.	Recommended load, kg (lbs)					Speed	kmph mph
										Speed kmph (mph)						
			Non-Cyclic Operations							Cyclic Operations						
			10	20						30	40	50	10	15		
			6	12						19	25	31	6	9		
			Constand load							kg lbs		Recom. Load	kg lbs			
								bar psi								

460/70 R 24	159 A8/B	W15L W16L	455 17.9	1254 49.4	566 22.3	3713 146	33 42	96 212	2.4	4040	3520	3360	3230	3230	4850	4330
									35	8900	7750	7400	7110	46835	10680	9540
									2.8	4430	3860	3680	3540	3540	5310	4740
									41	9760	8500	8110	7800	51330	11700	10440
									3.0	4610	4020	3840	3690	3690	5540	4940
									44	10150	8850	8460	8130	53505	12200	10880
									3.6	5140	4480	4270	4110	4110	6170	5510
									52	11320	9870	9410	9050	59595	13590	12140
									4	5470	4770	4550	4375	4375	6560	5860
									58	12050	10510	10020	9640	63437.5	14450	12910



## FEATURES

- Designed for on and off-road service
- Wide diagonal lugs
- Multi use pattern

## BENEFITS

- Self cleaning properties
- Resistant to side slip
- Excellent traction in all weather and service conditions



# MPT 602

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLC	RC	RCI	Infl. Press.	Load capacity	
					SW	OD					Max Speed	Max Load
					mm in	mm in	mm in	mm in		bar psi	kmph mph	kg lbs
12.5-18	12	TL	134 D	11.0	325 12.8	990 39.0	455 17.9	2910 114.6	34	3.5 51	65 40	2120 4665
10.00-20	16	TT	146 B	7.5	280 11.0	1075 42.3	509 20.0	3255 128.1	36	7.5 109	50 31	3000 6610
12.5-20	12	TL	135 D	11.0	325 12.8	1042 41.00	480 18.9	3065 120.7	35	3.5 51	65 40	2180 4795
405/70-20 (16.0/70-20)	14	TL	148 D	13.0	405 15.9	1180 42.7	547 19.7	3470 125.6	36	3.5 51	65 40	3150 6930
405/70-24 (16.0/70-24)	14	TL	151 D	13.0	405 15.9	1186 46.5	547 21.5	3535 139.2	38	4 58	65 40	3450 7950





## »»» FEATURES

- Robust casing to have better lateral stability
- Strong nylon casing
- Cut resistant tread compound

## »»» BENEFITS

- Provide traction as well as high flotation
- Agro industrial tyre designed for telehandlers and other material handlers



# MPT 800

Size	PR	Type	LI/SS	Rim	Unloaded Dimension		SLC	RC	RCI	Infl. Press.	Load capacity	
					SW	OD					Max Speed	Max Load
					mm in	mm in	mm in	mm in		bar psi	kmph mph	kg lbs
405/70-20 (16.0/70-20)	14	TL	149 B	13.00	405 15.9	1098 43.2	505 19.8	3225 126.9	36	3.5 51	50 30	3250 7165
405/70-24 (16.0/70-24)	14	TL	152 B	13.00	405 15.9	1188 46.7	551 21.9	3490 137.4	38	4 58	50 30	3550 7825





# TYRE CARE AND USAGE MANUAL



## GENERAL INFORMATION

CEAT Agri radial tyres are designed for both off road and on road applications for equipment like agricultural tractors, trailers, implements and harvesters. Factors such as improper selection, handling and driving habits can reduce tyre life.

To obtain the best results from the tyre, correct inflation pressure has to be maintained at all times. It is recommended to check the inflation pressure after long breaks or on daily basis. If the heat buildup due to the inflation pressure exceeds additional 1.1 bar (16 psi) to 1.0 bar (14.5 psi), then the load or driving speed has to be lowered.

### **MOUNTING AND DEMOUNTING**

Always practice correct mounting and dismounting procedure and by taking all safety measures.

### **DIMENSIONS**

All the dimensions and the tolerances in this catalogue are based on nominal TRA and ETRTO standards.

## QUALITY SYSTEMS AND CERTIFICATION

CEAT, an ISO 9001 certified company since 1994, also is the first tyre company in India to be certified with the most stringent quality certification of ISO/T5 16949: 2002 (QS 9000) from TUV.


The tyres manufactured by CEAT are DOT, ECE and INMETRO certified.

### **QUALITY POLICY**


We, at CEAT are committed to be customer centric by consistently delivering excellent products and services at competitive prices.

It will be our endeavor to continuously improve all business processes and ensure conformity to the established quality systems.

We intend to accomplish this through constantly upgrading the skills of our employees.

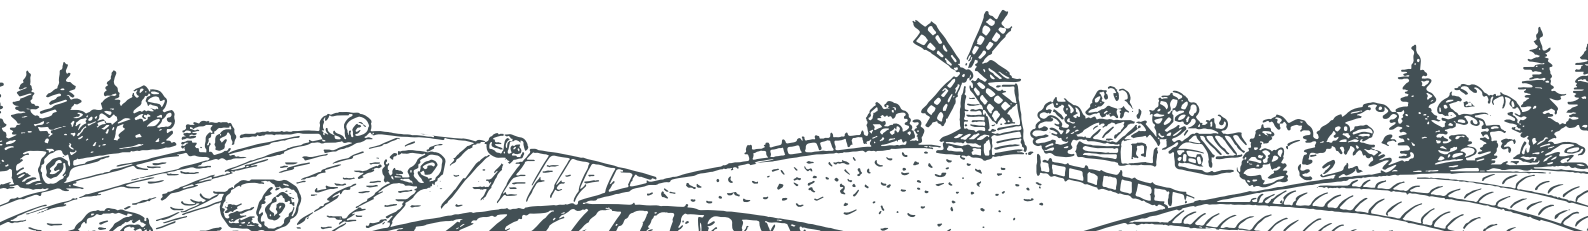

## TYRE DESCRIPTION

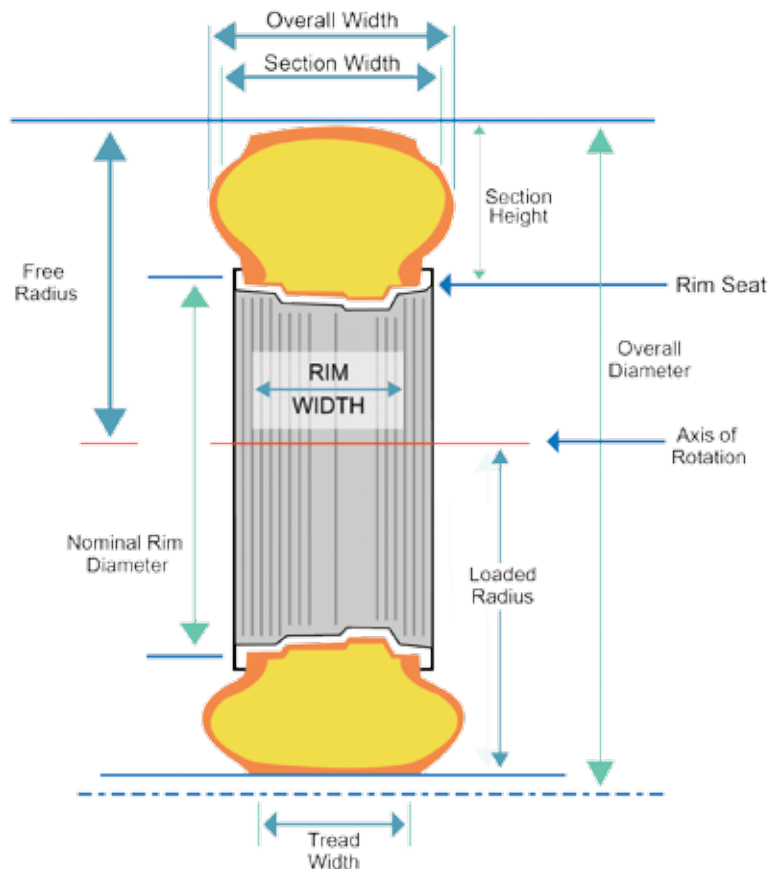

**Section Height:** The height of a new tyre from the nominal rim diameter to the top of the tread.

**Section Width:** The width of a new tyre including normal sidewalls, but not including protective side ribs, bars, or other decorations.

**Overall Diameter:** Twice the section height (unloaded) plus the nominal rim diameter.

**Rim Width:** The measurement on the inside of the rim between the two flanges.

**Rim Diameter Code:** The nominal rim diameter in inches.

**Rolling Circumference:** The distance an inflated and loaded tyre will roll in one revolution.

**Aspect Ratio:** Used to describe the ratio of tyre “section height” to “section width.” A tyre with an aspect ratio of 85 would have a tyre height equal to 85% of the tyre’s greatest width.






# TYRE NOMENCLATURE




## 440/65 R 24

### RADIAL

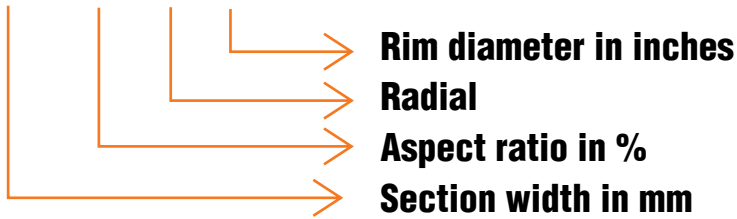


## 17.5 - 25



### BIAS

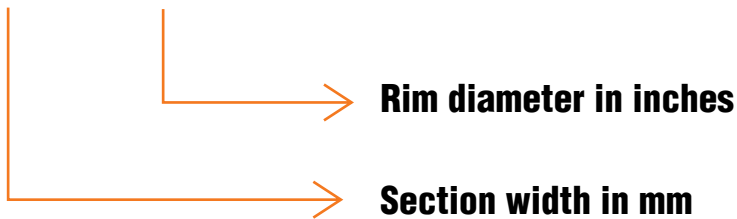

## 500/50 - 17

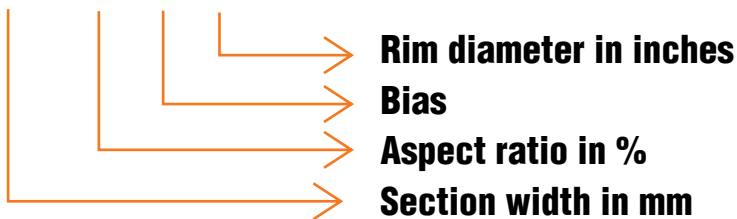

## TYRE SIDEWALL MARKING

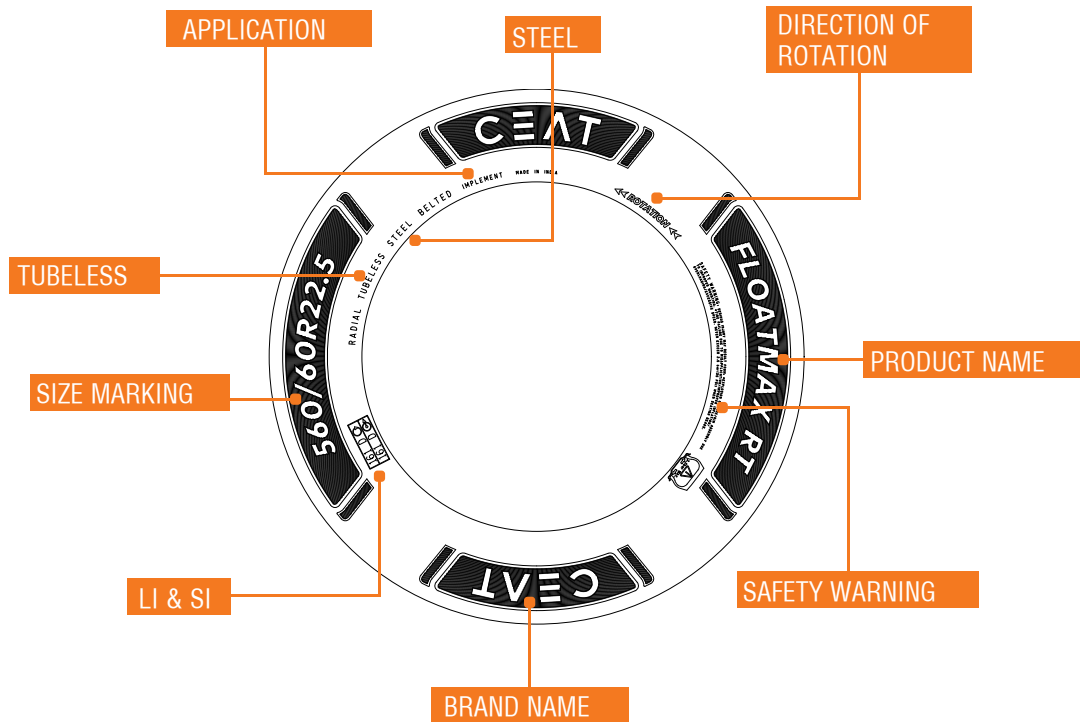

**Travel direction in case of directional tread design**



**Safety Warning**

**Tubeless**

**Tubeless - Tyres without tube**



**Free rolling and drive wheels**

**Load Index:** Relates to the maximum weight permitted for each tyre at a set inflation pressure.

**Speed Index:** Is the maximum rated speed the tyre can operate at safety. For application at lower speed load carrying capacity of tyre increases and vice versa.

**L(In Size Designation):** Low section height farm tyres

**SL(In Size Designation):** Service limited to agricultural usage

**NHS:** Not for highway service

**ML:** Mining logging (Intermittent Highway use)

**DT:** Desert tyre (Sand surface and asphalt spreader)



## LOAD INDEX AND SPEED SYMBOL

According to ETRTO (The European Tyre and Rim Technical Organization), as well as to ECE (Economic Commission for Europe-UN Institution Geneva), the maximum load capacity, as well as the maximum speed are indicated by load index and speed symbol.

The following table shows the meaning of each speed symbol and the load in kg/lbs corresponding to each load index:

Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Load Index	Load Kg / lbs	Speed Symbol	Kmph / mph
102	850 / 1874	129	1850 / 4078	156	4000 / 8818	183	8750 / 19290	A1	5 / 3
103	875 / 1929	130	1900 / 4189	157	4125 / 9094	184	9000 / 19841	A2	10 / 6
104	900 / 1984	131	1950 / 4299	158	4250 / 9369	185	9250 / 20392	A3	15 / 9
105	925 / 2039	132	2000 / 4409	159	4375 / 9645	186	9500 / 20944	A4	20 / 12
106	950 / 2094	133	2060 / 4541	160	4500 / 9921	187	9750 / 21495	A5	25 / 16
107	975 / 2149	134	2120 / 4674	161	4625 / 10196	188	10000 / 22046	A6	30 / 19
108	1000 / 2205	135	2180 / 4806	162	4750 / 10472	189	10300 / 22707	A7	35 / 22
109	1030 / 2271	136	2240 / 4938	163	4875 / 10747	190	10600 / 23369	A8	40 / 25
110	1060 / 2337	137	2300 / 5071	164	5000 / 11023	191	10900 / 24030	B	50 / 31
111	1090 / 2403	138	2360 / 5203	165	5150 / 11354	192	11200 / 24691	C	60 / 37
112	1120 / 2469	139	2430 / 5357	166	5300 / 11684	193	11500 / 25353	D	65 / 40
113	1150 / 2535	140	2500 / 5511	167	5450 / 12015	194	11800 / 26014	E	70 / 44
114	1180 / 2601	141	2575 / 5677	168	5600 / 12346	195	12150 / 26786	F	80 / 48
115	1215 / 2679	142	2650 / 5842	169	5800 / 12787	196	12500 / 27557	G	90 / 56
116	1250 / 2756	143	2725 / 6007	170	6000 / 13228	197	12850 / 28329	J	100 / 62
117	1285 / 2833	144	2800 / 6173	171	6150 / 13558	198	13200 / 29101	K	110 / 68
118	1320 / 2910	145	2900 / 6393	172	6300 / 13889	199	13600 / 29982	L	120 / 75
119	1360 / 2998	146	3000 / 6614	173	6500 / 14330	200	14000 / 30864	M	130 / 81
120	1400 / 3086	147	3075 / 6779	174	6700 / 14771	201	14500 / 31966	N	140 / 87
121	1450 / 3197	148	3150 / 6944	175	6900 / 15212	202	15000 / 33069	P	150 / 93
122	1500 / 3307	149	3250 / 7165	176	7100 / 15653	203	15500 / 34171	Q	160 / 99
123	1550 / 3417	150	3350 / 7385	177	7300 / 16093	204	16000 / 35273	R	170 / 106
124	1600 / 3527	151	3450 / 7606	178	7500 / 16534	205	16500 / 36376	S	180 / 112
125	1650 / 3638	152	3550 / 7826	179	7750 / 17086	206	17000 / 37478		
126	1700 / 3748	153	3650 / 8047	180	8000 / 17637	207	17500 / 38580		
127	1750 / 3858	154	3750 / 8267	181	8250 / 18188	208	18000 / 39683		
128	1800 / 3968	155	3875 / 8543	182	8500 / 18739	209	18500 / 40785		



# RMA CODE FOR AGRICULTURAL TYRES AND TYPE OF TYRE SERVICE

## RMA INDUSTRY CODES

The Tyre and Rim Association has approved the following tyre designations for agricultural tyres, regardless of manufacturer.

CODE	INDUSTRY TYRE TYPE	TYRE SERVICE
<b>Front Tractor Tyres</b>		
F-1	Agricultural single rib tread	Rice farming
F-2M	Agricultural multiple-rib tread	General farming
F-2	Agricultural multiple-rib tread	General farming
F-3	Industrial multiple-rib tread	Light industrial service
F-2D	Agricultural dual rib	
<b>Drive Tractor Tyres</b>		
R-1	Drive wheel, regular tread	General farming
R-1W	Drive wheel, wet traction tread	Wet or moist soil Wet muck,
R-2	Cane and Rice, drive wheel, deep tread	Sugar cane, Rice farming Sandy or volcanic ash soils,
R-3	Drive wheel, shallow tread	Orchards, Highway mowing, Golf course work, Light industrial service
R-4	Industrial tractor, drive wheel, intermediate tread	Light industrial service, Highway mowing
<b>Flotation Tyres</b>		
HF-1	High flotation, rib tread	Golf course work
HF-2	High flotation, regular lug tread	General farming
HF-3	High flotation, deep lug tread	Wet or moist soil
HF-4	High flotation, extra deep tread	Swamp land
<b>Garden Tractor Tyres</b>		
	Lug Type	Gardens
<b>Implement Tyres</b>		
I-1	Rib tread	Free rolling wheels
I-2	Moderate traction implement	Drive or free rolling wheels
I-3	Traction tread	Drive wheels
I-6	Smooth tread	



## CONVERSION TABLE

1 centimeter	cm	= 0.3937 inch	1 liter	l	= 0.264 US gallon
1 inch	in	= 2.54 cm	1 US gallon	gal	= 3.785 liters
1 Meter	m	= 3.281 feet	1 kilogram	kg	= 2.205 pounds
1 foot	ft	= 0.3048 m	1 kilogram	kg	= 1 da N (de anewton)
1 kilometer	km	= 1. 6093 km	1 Pound	lb	=0.4536 kg
1 mile	mi		1 bar		= 14.484 p.s.i. (Pounds per square inch)
			1 bar		= 100 kpa (kilo pascal)

## PRESSURE CONVERSION TABLE

PSI	BAR	KPA	PSI	BAR	KPA	PSI	BAR	KPA
10	0.7	70	29	2	200	48	3.3	330
11	0.8	80	30	2.1	210	49	3.4	340
12	0.8	80	31	2.1	210	50	3.4	340
13	0.9	90	32	2.2	220	51	3.5	350
14	1	100	33	2.3	230	52	3.6	360
15	1	100	34	2.3	230	53	3.7	370
16	1.1	110	35	2.4	240	54	3.7	370
17	1.2	120	36	2.5	250	55	3.8	380
18	1.2	120	37	2.6	260	56	3.9	390
19	1.3	130	38	2.6	260	57	3.9	390
20	1.4	140	39	2.7	270	58	4	400
21	1.4	140	40	2.8	280	59	4.1	410
22	1.5	150	41	2.8	280	60	4.1	410
23	1.6	160	42	2.9	290	61	4.2	420
24	1.7	170	43	3	300	62	4.3	430
25	1.7	170	44	3	300	63	4.3	430
26	1.8	180	45	3.1	310	64	4.4	440
27	1.9	190	46	3.2	320	65	4.5	450
28	1.9	190	47	3.2	320	66	4.5	450



## TYRE CARE AND MAINTENANCE GUIDELINES

### GENERAL

1. Tyre mounting and dismounting can be dangerous and should only be performed by trained personnel.
2. Never strike the tyre or rim with a hammer.
3. Always use proper tyre mounting tools and equipment.
4. Always work on a clean surface.

### MOUNTING

1. Thorough inspection of the inside of the casing is necessary to ensure absence of any defects or foreign material.
2. Both tyre and tube (if any) should be completely dry.
3. Use the correct tube. Always remember that with a new tyre, a new tube (if required) should be used.
4. For tube type tyres, make sure tube and flap are correct and not damaged.
5. Always prepare a new O-ring for tubeless type tyres. Check air leakage points.
6. Correct rims which are clean and in good condition should be used for tyre mounting.
7. Proper lubrication to rims and beads helps to facilitate easy and safe mounting.
8. Application of excessive lubricant causes the tyre to slip on the rim, hence it should not be practiced.
9. Mount the tyre with the pry notch 60° to 90° from the valve.
10. Always mount (and dismount) tyres on the short side of the rim drop centre.
11. Always keep the opposite bead in the deep well to facilitate clearance over the rim flange to prevent bead damage.

### INFLATION AND PROPER BEAD SEATING

1. Once a tyre is mounted the beads should be seated before the lubricant dries.
2. Safety cage or a security bar should be used during inflation, in case the cage and bar is absent stand to one side of the tyre and use an air line with a clip-on chuck and an in-line gauge that is at least 6 feet from the tyre valve.
3. Centre the tyre on the rim and inflate to 35 psi (2.4 bar) to obtain initial bead seat.
4. Deflate the tyre to about 2 psi (0.14 bar) to partially relax the beads.
5. Re-inflate the tyre to 35 psi (2.4 bar) to obtain final bead seat.
6. Adjust the tyre to the correct working pressure.
7. Ensure the pressure is correct at all times. Check the pressure regularly and adjust it whenever necessary.
8. Check the loads and their centring periodically.
9. Check the traveling cycles and the actual operating speed.
10. Thoroughly inspect the centring rings above the inside and outside beads to ensure that they are completely seated.
11. If a bead is not completely seated:
  - Deflate the tyre completely and re-inflate to 35 psi (2.4 bar).
  - If a bead is not completely seated at this point, deflate the tyre, break the beads away from the rim, rotate the tyre 90° and re-lubricate the beads and the rim, and repeat steps 3 through 7 above.
12. Use proper inflation pressure. Never under inflate or over inflate the tyres. Never inflate an agricultural tyre over 35 psi (2.4 bar) to seat the beads.





## BALLASTING

To achieve better traction and to enhance performance the tyres are often ballasted.

Ballasting can be done in two ways:

1. Inserting substances inside the tyre.
2. Attaching counter weights to the back of the vehicle.

Since the second method involves welding or bolting weights to the back of the vehicles, many operators choose the first method of tyre ballasting. This practice is used to enhance the performance of front-end loaders, motor graders or grader tractors. Ballasting helps keep the rear tyres of the front-end loaders grounded.

Ballasting is usually done by filling tyre with water. In cold climatic conditions anti freezing substances like Calcium Chloride (80%) or Magnesium Chloride (47%) can be added.

### Ballasting tyres with a liquid

Agricultural tyre valves are of the “air and water type”. Therefore, filling up to a maximum of 75 % (Diagram 1), with liquid (water + antifreeze) is possible.

In winter, as temperatures may fall below zero, a glycol-based antifreeze product should be used. With the air water valve at the top, fill the inner tube or tubeless tyre up to the height of the valve, while allowing the air to escape (Diagram 2).

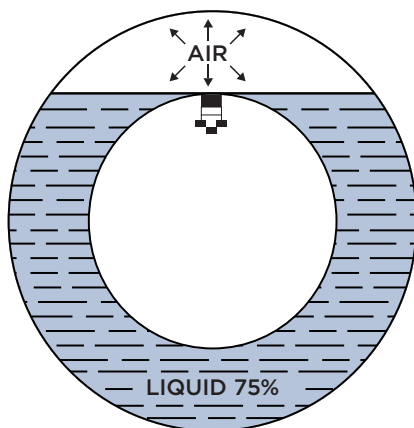


DIAGRAM 1


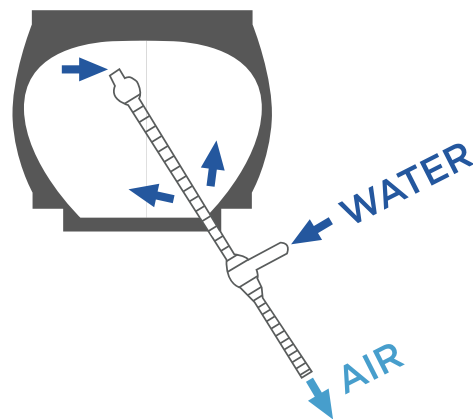


DIAGRAM 2

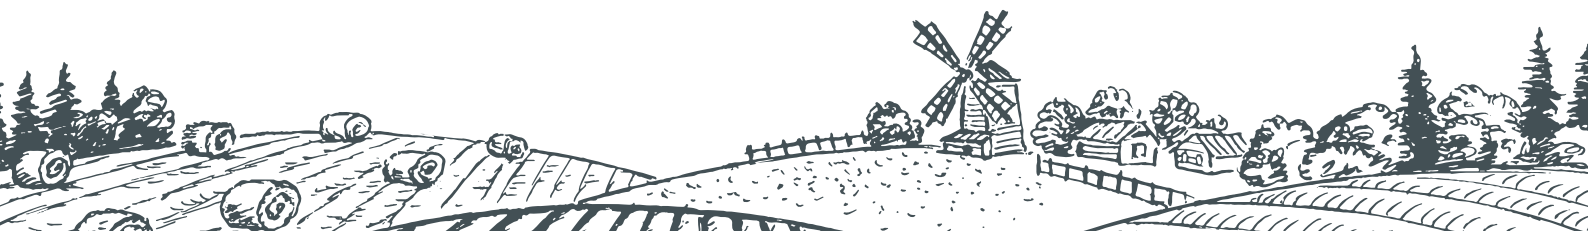

Inflation and pressure are adjusted to the air. Since the volume of air responsible for pressure is low (around 25% of the volume), regular monitoring of the tyre pressure is essential. We recommend verification on a monthly basis.

However the following points must be taken into consideration while using tyre ballasting practice:

- Before rotating ballasted tyres the ballasting solution (liquid) or material (dry) must be removed and properly disposed off.
- Ballasting solution can facilitate rim rust. The rim should be well painted or the solution must contain rust prohibitive ingredients.

### **Demounting**

1. Follow the reverse process of mounting to demount the tyre from rim.
2. Tyres with a pry notch above the bead should be lubricated at the notch before pushing the bead away from the rim flange.
3. Lubricate around the bead circumference as it is worked away from the flange.
4. Lubricate the back bead and the rim flange during dismounting.



## DEFINITION OF TERMS

### **Agricultural Tractor**

Self-propelled agricultural vehicle having at least two axles and wheels, or endless tracks, particularly designed to pull agricultural trailers and pull, push, carry and operate implements used for agricultural work (including forestry work), which may be provided with a detachable loading platform

The agricultural vehicle has a maximum design speed of not less than 6 kmph and may be equipped with one or more seats.

### **Two-wheel drive tractor (2WD)**

Agricultural tractor with traction power provided only through the rear tyres. The front tyres are smaller than the rear and typically use a profile type with no traction capability.


### **Four-wheel drive tractor with equal sized wheels (4WD)**

All-wheel drive tractor with equal sized wheels and having power to both axles

### **Compact utility tractor**

Agricultural tractor equipped with a 540-rpm rear PTO and a three-point hitch designed for Category I implements only.

These tractors generally have a mass less than 1800 kg; have less than 30 PTO kW, and are primarily designed and advertised for use with mowers and light-duty material handling equipment. The rear PTO and hitch categories are defined by ISO 500 1 and ISO 730, respectively.

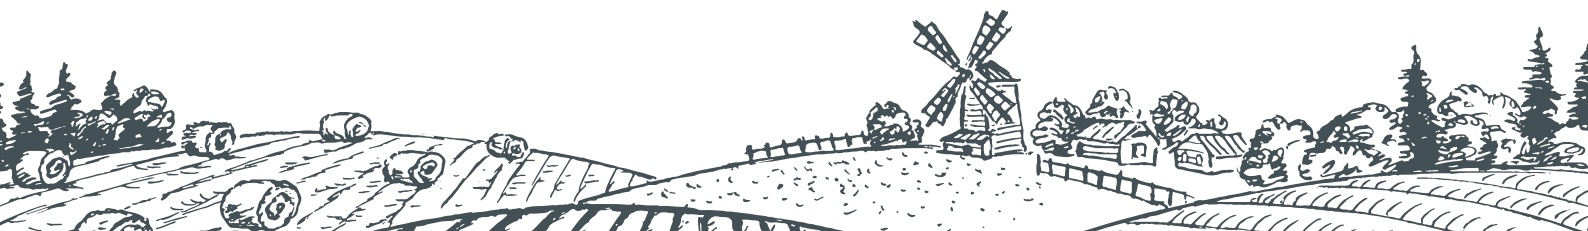

## IMPORTANT PARAMETERS FOR MAXIMUM TYRE LIFE

Following are some important parameters needed to be monitored in order to get maximum tyre life:

- To obtain maximum tyre life, operate within the recommended load inflation pressure schedule.
- Sufficient tyre to vehicle clearance
- Removal of rocks and debris trapped between dual tyres or between tyre and the vehicle or in the grooves of the tyre.
- Proper matching of dual tyres that is the inflated diameters of both the tyres should match.
- Keep the tyres free from oil, grease etc.
- To keep proper tyre performance record Check:
  1. Brand and serial no.
  2. New tyre tread depth
  3. Original and subsequent installations and removals by unit number and position
  4. Final disposition - scrap, repair, retread, total hours or miles of service and date of removal.
- Thorough and accurate record keeping helps in determination of problem areas causing failures.
- Proper attention to be given for vehicle mechanical irregularities such as misalignment, improperly adjusted brakes or defective brake drums etc. which have damaging effect on tyres.
- Proper checking & maintenance of rims or wheels and valves.
- Proper storage of tyres. Tyres should be stored in cool and dark places, free from dirt, oil or sunlight and as far as possible from running electric motors (as these generate ozone which deteriorates rubber.)
- Prompt repair of service damaged tyres. There are usually three major types of cuts or damage which occur in tyres.
  - Tread surface cuts - these types of cuts might look minor, but they have a tendency to pick up and hold stones. If the stones are not removed, they can work their way into the carcass resulting in tyre failure.
  - Cuts through the tread - damage from this type of injury may lead to premature tyre failure. When it is determined that the carcass of the tyre has been damaged, the tyre should be removed from service immediately and sent to a qualified repair facility.
  - Sidewall cuts - these are repairable depending on the location and extent of damage.



## PROPER HANDLING AND TRANSPORTING TYRES

When transporting tyres particular care must be taken to ensure that the beads and inner liner of the tyre are not damaged. Damage of even a minor nature, could result in premature tyre failure due to air seeping into the body of the tyre, causing a separation.

### CORRECT



### INCORRECT



GOOD




BAD



BAD

### PROPER STORAGE:

- Do not store tyres for longer periods.
- Tyres/tubes must not get exposed to direct sunlight during storage.
- Storage area must be free from dirt and oils and away from electric engines.

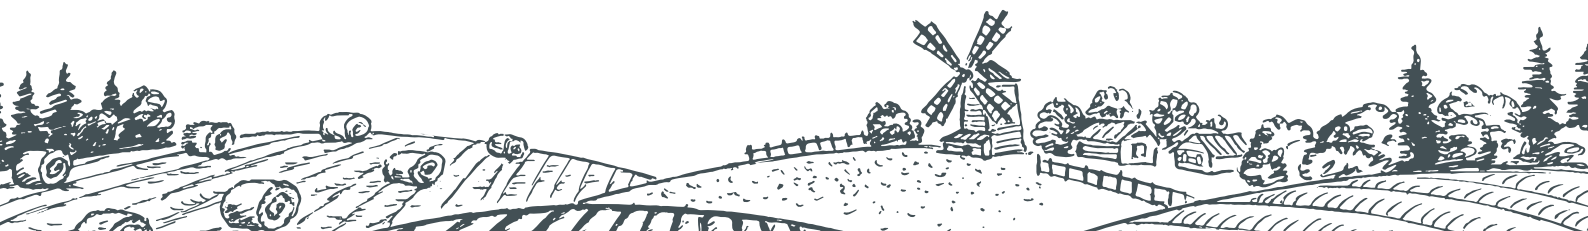

## SAFETY PRECAUTIONS

1. NEVER re-inflate a tyre that has been in a run-flat or underinflated condition (80% or less of recommended pressure).
2. ALWAYS use specialized tools as recommended by the tyre suppliers for mounting and demounting the tyres.
3. BEFORE loosening any nuts or clamps that attach a multi-piece rim assembly to a vehicle, always completely deflate the tyre (both tyres of a dual assembly) by taking out the valve core(s). Never attempt to demount a tyre from a rim unless you are sure that the tyre is completely deflated. Failure to follow this practice can cause the assembly to burst with force sufficient to cause serious injury or death.
4. NEVER use any rim part that is bent, pitted from corrosion, cracked or worn. These are unserviceable parts and must be destroyed so that they cannot be used. Remove rust, dirt or foreign material from rim parts.
5. NEVER use a rim part unless you can positively identify it from the manufacturer's stamped markings. If you cannot identify a part, it must be destroyed.
6. ALWAYS inspect inside of a tyre for loose cords, cuts, penetrating objects or other casing damage. Repairable damage must be repaired by trained personnel before placing the tyre back into service. Tyres with irreparable damage should be destroyed.
7. NEVER substitute an inner tube for a permissible or non-permissible repair.
8. ALWAYS replace a tyre with one having the same rim diameter designation and suffix letters.
9. ALWAYS inspect the inside of a tyre and remove dirt, liquids or other foreign material before mounting.
10. NEVER install tubes that have buckled or been creased.
11. ALWAYS use radial tubes with radial tyres.
12. ALWAYS use new tubes with new tyres.
13. NEVER use a tube in a casing larger or smaller than that for which the tube was designed by the manufacturer.
14. ALWAYS check to be sure that the tube is clean before installing in the tyre.





15. ALWAYS lubricate with only approved tyre mounting lubricants or mild vegetable oil, or soap solution. Never use antifreeze, silicones or petroleum-based lubricants. This will damage the tyre.
16. ALWAYS inspect the valve cores for proper air retention. Replace damaged or leaky cores.
17. ALWAYS inflate tyres to tyre manufacturer's recommended cold inflation pressure for the tyre's intended service.
18. When inflating a tyre not on a vehicle, use a safety cage or other restraining device, and an extension hose with in-line air gauge and clip-on air chuck, which allows the operator to stand clear of the trajectory.
19. For tube-type tyres, inflate to service pressure without the valve core installed and then completely deflate the tyre to prevent wrinkles in the tube. Insert the valve core and re-inflate the tyre to recommended service pressure as specified for the tyre and rim.
20. ALWAYS use sealing valve caps to prevent loss of air or fluid.



# SKU CODE INDEX


## RADIAL

SL NO.	SKU CODE	SIZE	PATTERN	LI/SI	RCI	PAGE NO.
1	104902	280/85 R 20	FARMAX R85	112A8/B	34	15
2	105245	320/85 R 20	FARMAX R85	119A8/B	35	15
3	104901	250/85 R 24	FARMAX R85	109A8/B	35	15
4	104903	280/85 R 24	FARMAX R85	115A8/B	36	15
5	104905	320/85 R 24	FARMAX R85	122A8/B	37	15
6	105895	320/85 R 24	FARMAX R85	142A8/B	37	16
7	104874	340/85 R 24	FARMAX R85	125A8/B	37	16
8	104876	380/85 R 24	FARMAX R85	131A8/B	38	16
9	104908	420/85 R 24	FARMAX R85	137A8/B	39	16
10	104904	280/85 R 28	FARMAX R85	118A8/B	37	16
11	105655	320/85 R 28	FARMAX R85	124A8/B	38	17
12	104875	340/85 R 28	FARMAX R85	127A8/B	39	17
13	104877	380/85 R 28	FARMAX R85	133A8/B	40	17
14	104909	420/85 R 28	FARMAX R85	139A8/B	41	17
15	104907	380/85 R 30	FARMAX R85	135A8/B	41	17
16	104910	420/85 R 30	FARMAX R85	140A8/B	41	18
14	105860	420/85 R 30	FARMAX R85	147A8/B	41	17
17	104913	460/85 R 30	FARMAX R85	145A8/B	42	18
18	105246	320/85 R 32	FARMAX R85	126A8/B	40	18
19	105941	320/85 R 32	FARMAX R85	142A8/B	40	18
20	105241	380/85 R 34	FARMAX R85	137A8/B	42	19
21	104911	420/85 R 34	FARMAX R85	142A8/B	43	19
22	105338	420/85 R 34	FARMAX R85	147A8/B	43	19
23	104914	460/85 R 34	FARMAX R85	147A8/B	44	19
24	105340	460/85 R 34	FARMAX R85	157A8/B	44	19
25	105247	320/85 R 36	FARMAX R85	128A8/B	41	20
26	105244	340/85 R 36	FARMAX R85	132A8/B	42	20
27	105690	320/85 R 38	FARMAX R85	143A8/B	42	20
28	104906	340/85 R 38	FARMAX R85	133A8/B	43	20
29	105942	340/85 R 38	FARMAX R85	148A8/B	43	20
30	104912	420/85 R 38	FARMAX R85	144A8/B	44	21
31	104915	460/85 R 38	FARMAX R85	149A8/B	45	21
32	105341	460/85 R 38	FARMAX R85	167A8/B	45	21
33	104916	520/85 R 38	FARMAX R85	155A8/B	46	21
34	105657	520/85 R 38	FARMAX R85	169A8/B	46	21





SL NO.	SKU CODE	SIZE	PATTERN	LI/SS	RCI	PAGE NO.
35	105242	520/85 R 42	FARMAX R85	157A8/B	47	22
36	105339	520/85 R 42	FARMAX R85	169A8/B	47	22
37	105243	520/85 R 46	FARMAX R85	158A8/B	48	22
38	105658	520/85 R 46	FARMAX R85	174A8/B	48	22
39	105333	380/80 R 38	FARMAX R80	142A8/B	43	23
40	105262	480/80 R 42	FARMAX R80	151A8/B	46	23
41	105263	480/80 R 46	FARMAX R80	158A8/B	47	23
42	105325	260/70 R 20	FARMAX R70	113A8/B	32	24
43	105334	280/70 R 20	FARMAX R70	116A8/B	32	24
44	105261	300/70 R 20	FARMAX R70	110A8/B	33	24
45	105406	300/70 R 20	FARMAX R70	120A8/B	33	24
46	105248	320/70 R 20	FARMAX R70	113A8/B	34	24
47	105257	320/70 R 20	FARMAX R70	123A8/B	34	25
48	105253	360/70 R 20	FARMAX R70	120A8/B	35	25
49	105266	360/70 R 20	FARMAX R70	129A8/B	35	25
50	105258	380/70 R 20	FARMAX R70	122A8/B	35	25
51	105267	380/70 R 20	FARMAX R70	132A8/B	35	25
52	105249	320/70 R 24	FARMAX R70	116A8/B	36	26
53	105254	360/70 R 24	FARMAX R70	122A8/B	37	26
54	105259	380/70 R 24	FARMAX R70	125A8/B	37	26
55	105268	420/70 R 24	FARMAX R70	130A8/B	38	26
56	105270	480/70 R 24	FARMAX R70	138A8/B	39	26
57	105250	320/70 R 28	FARMAX R70	119A8/B	38	27
58	105255	360/70 R 28	FARMAX R70	125A8/B	38	27
59	105260	380/70 R 28	FARMAX R70	127A8/B	39	27
60	105269	420/70 R 28	FARMAX R70	133A8/B	40	27
61	105271	480/70 R 28	FARMAX R70	140A8/B	41	27
62	105943	480/70 R28	FARMAX R70	151A8/B	41	27
63	105322	420/70 R 30	FARMAX R70	134A8/B	40	28
64	105272	480/70 R 30	FARMAX R70	141A8/B	41	28
65	105659	480/70 R 30	FARMAX R70	147D/150A8	41	28
66	105326	520/70 R 30	FARMAX R70	145A8/B	42	28
67	105273	480/70 R 34	FARMAX R70	143A8/B	43	28
68	105661	520/70 R 34	FARMAX R70	148A8/B	44	29
69	105327	520/70 R 38	FARMAX R70	150A8/B	45	29
70	105342	580/70 R 38	FARMAX R70	155A8/B	46	29
71	105666	440/65 R 24	FARMAX R65	128D	37	31
72	105945	440/65 R 24	FARMAX R65	135D	37	31
73	105256	480/65 R 24	FARMAX R65	133D	38	31

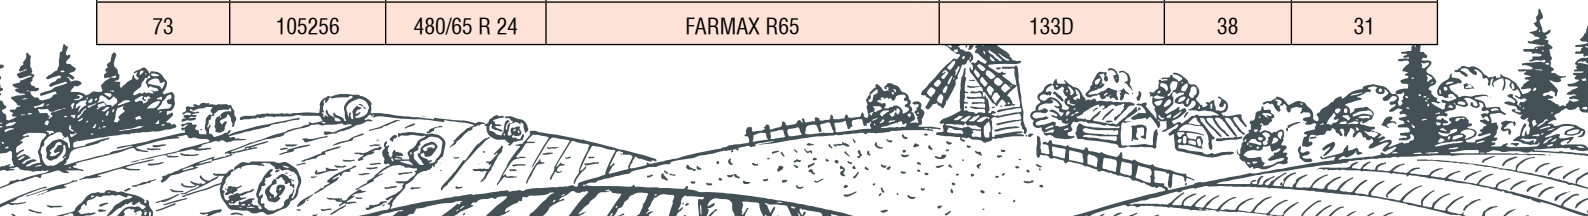

# RADIAL

SL NO.	SKU CODE	SIZE	PATTERN	LI/SS	RCI	PAGE NO.
74	105939	480/65 R 24	FARMAX R65	140D	38	31
75	105332	540/65 R 24	FARMAX R65	140D	39	31
76	105670	540/65 R 24	FARMAX R65	146D	39	31
77	105667	440/65 R 28	FARMAX R65	138D	39	32
78	105408	480/65 R 28	FARMAX R65	136D	40	32
79	105940	480/65 R 28	FARMAX R65	142D	40	32
80	105251	540/65 R 28	FARMAX R65	142D	41	32
81	105671	540/65 R 28	FARMAX R65	149D	41	32
82	105335	540/65 R 30	FARMAX R65	143D	41	33
83	105672	540/65 R 30	FARMAX R65	150D	41	33
84	105336	540/65 R 34	FARMAX R65	145D	43	33
85	105673	540/65 R 34	FARMAX R65	152D	43	33
86	105337	600/65 R 34	FARMAX R65	151D	44	33
87	105675	600/65 R 34	FARMAX R65	157D	44	34
88	105669	540/65 R 38	FARMAX R65	147D	44	34
89	105674	540/65 R 38	FARMAX R65	153D	44	34
90	105409	600/65 R 38	FARMAX R65	153D	45	34
91	105252	650/65 R 38	FARMAX R65	157D	46	34
92	105676	650/65 R 38	FARMAX R65	163D	46	35
93	105407	650/65 R 42	FARMAX R65	158D	47	35
94	105677	650/65 R 42	FARMAX R65	165D	47	35
95	105328	320/80 R 42	FARMAX RC	141A8/B	43	37
96	105329	380/90 R 46	FARMAX RC	165A8/B	46	37
97	105330	300/95 R 46	FARMAX RC	143D/146A8	45	37
98	105697	300/95 R 46	FARMAX RC	148D/151A8	45	37
99	105323	230/95 R 48	FARMAX RC	136D/139A8	44	37
100	105324	270/95 R 48	FARMAX RC	142D/145A8	45	38
101	105331	340/85 R 48	FARMAX RC	151D/154A8	45	38
102	105343	560/55 R 22.5	FLOATMAX FT	152D	36	47
103	105265	600/55 R 26.5	FLOATMAX FT	165D	40	47



Sr.No	SKU CODE	SIZE	PATTERN	PR	TYPE	PAGE NO.
1	102898	8.3-24	FARMAX R1	8	TT	41
2	102899	9.5-24	FARMAX R1	8	TT	41
3	102900	11.2-24	FARMAX R1	8	TT	41
4	102698	12.4-24	FARMAX R1	8	TT	41
5	103383	13.6-24	FARMAX R1	8	TT	41
6	102691	14.9-24	FARMAX R1	8	TT	41
7	102704	16.9-24	FARMAX R1	8	TT	41
8	102692	18.4-26	FARMAX R1	12	TT	41
9	105298	23.1-26	FARMAX R1	16	TL	41
10	102703	11.2-28	FARMAX R1	8	TT	41
11	102901	12.4-28	FARMAX R1	8	TT	41
12	102902	13.6-28	FARMAX R1	8	TT	42
13	102699	14.9-28	FARMAX R1	8	TT	42
14	102700	16.9-28	FARMAX R1	12	TT	42
15	102701	16.9-30	FARMAX R1	10	TT	42
16	102693	18.4-30	FARMAX R1	12	TT	42
17	103008	18.4-34	FARMAX R1	8	TT	42
18	102702	18.4-34	FARMAX R1	12	TT	42
19	102706	13.6-36	FARMAX R1	8	TT	42
20	102697	13.6-38	FARMAX R1	8	TT	42
21	102694	15.5-38	FARMAX R1	8	TT	42
22	103004	15.5-38	FARMAX R1	10	TT	42
23	102705	16.9-38	FARMAX R1	8	TT	42
24	103006	16.9-38	FARMAX R1	10	TT	42
25	103009	18.4-38	FARMAX R1	8	TT	42
26	102707	18.4-38	FARMAX R1	12	TT	42
27	103523	10.00-16SL	FARMAX F2M	8	TL	44
28	103524	11.00-16SL	FARMAX F2M	8	TL	44
29	103953	500/50-17	FLOTATION T422	16	TL	49
30	105129	500/50-17	FLOTATION T422	18	TL	49
31	103479	500/60-22.5	FLOTATION T422	16	TL	49
32	102833	550/45-22.5	FLOTATION T422	16	TL	49
33	103141	550/45-22.5	FLOTATION T422	20	TL	49



Sr.No	SKU CODE	SIZE	PATTERN	PR	TYPE	PAGE NO.
34	102836	550/60-22.5	FLOTATION T422	16	TL	49
35	102417	600/50-22.5	FLOTATION T422	16	TL	49
36	103177	600/55-22.5	FLOTATION T422	16	TL	49
37	103176	700/40-22.5	FLOTATION T422	16	TL	49
38	103175	700/50-22.5	FLOTATION T422	16	TL	49
39	103261	600/55-26.5	FLOTATION T422	16	TL	49
40	103181	700/50-26.5	FLOTATION T422	16	TL	49
41	100862	#800/45-26.5	FLOTATION T422	12	TL	49
42	102841	800/45-26.5	FLOTATION T422	16	TL	49
43	103603	500/60-22.5	T422 VALUE PRO	16	TL	51
44	103604	550/45-22.5	T422 VALUE PRO	16	TL	51
45	103602	550/60-22.5	T422 VALUE PRO	16	TL	51
46	102835	400/60-15.5	TR800	14	TL	52
47	105128	400/60-15.5	TR800	18	TL	52
48	103274	480/45-17	FLOTATION PLUS	16	TL	53
49	101775	500/50-17	FLOTATION PLUS	14	TL	53
50	104862	500/60-22.5	FLOTATION TX440	16	TL	54
51	104840	550/60-22.5	FLOTATION TX440	16	TL	54
52	104861	600/50-22.5	FLOTATION TX440	16	TL	54
53	105653	600/50-22.5	FLOTATION TX440	18	TL	54
54	104863	700/40-22.5	FLOTATION TX440	16	TL	54
55	105654	700/40-22.5	FLOTATION TX440	18	TL	54
56	100043	11.2-24	IRROGATOR	4	TT	56
57	103584	14.9-24	IRROGATOR	8	TT	56
58	103582	11.2-38	IRROGATOR	6	TT	56
59	104361	15.5/80-24	LIFT PRO	16	TL	59
60	105345	460/70R24	LIFT PRO		TL	59
61	100075	#12.5-18	MPT 602	12	TL	60
62	100025	#10.00-20	MPT 602	16	TT	60
63	100076	#12.5-20	MPT 602	12	TL	60
64	101638	405/70-20 (16.0/70-20)	MPT 602	14	TL	60
65	101639	405/70-24 (16.0/70-24)	MPT 602	14	TL	60
66	105402	405/70-20	MPT 800	14	TL	61
67	105401	405/70-24	MPT 800	14	TL	61

#Sizes are available only in Altura











CEAT Specialty Tyres Ltd  
Email: [cstbv@ceat.com](mailto:cstbv@ceat.com)  
Website: [www.ceatspecialty.com](http://www.ceatspecialty.com)