

2015 EDITION

AGRICULTURAL tires

NEW PRODUCTS OF

2015



 **LINGLONG TIRE**

Products Map of Radial Agriculture Tire



Agricultural tires



combines
sprayers

- Superior traction
- Reduces soil compaction
- High load capacity
- Longer life
- High speed symbol



LR650

<u>440/65R24</u>	<u>600/65R28</u>	<u>540/65R30</u>	<u>710/70R38</u>
<u>440/65R28</u>	<u>600/65R38</u>	<u>540/65R34</u>	<u>710/70R42</u>
<u>480/65R24</u>	<u>540/65R24</u>	<u>650/65R38</u>	
<u>480/65R28</u>	<u>540/65R28</u>	<u>650/65R42</u>	



Agricultural tires



loaders
back-hoes

- Good resistance to punctures and wear
- High load capacity
- Superior traction



LR451

460/70R24 IND



LR650-Features & Benefits




Pattern characteristics:

- 1、 The broad tread help deliver exceptional traction, which helps reduce slip and fuel consumption.
- 2、 Oversize footprints help reduce soil compaction.
- 3、 A large air chamber allows for heavier loads.
- 4、 Deep lugs, optimized rubber compounds help reduce wear to give longer tire life.



Broad Tread

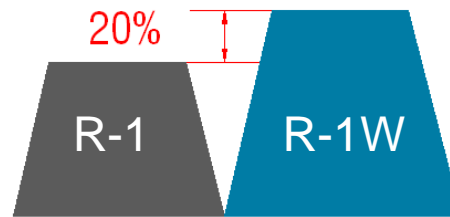

Deep Lug



Low Soil Compaction

LR650-Features & Benefits

NEW

★ High Speed :
Superb continuity, outstanding operator comfort , " D" Speed Rating, max speed can reach to 65KM/h.

★ High Load Capacity:
Inflation overall diameter up to 2061mm, for high horsepower harvesters.

★ Strong Apex Bead :
Adopt double apex filler to improve the apex bead endurance.

★ Low Soil Compaction :
Wider tread surface creates a 10% larger footprint when compared to standard radials, which helps to prevent soil compaction .

440/65R24 LR650

LINGLONG LR650

New products of 65 series

SAP号	Size	Load Index	Speed Symbols	Standard Rim	Load		Inflation		Overall Width		Overall Diameter	
					lbs	kg	psi	kPa	in	mm	in	mm
LL: 231002387_ LA: 231002388_ IN: 231002389_ BLA03: 231002524	480/65R28	136/139	D/A8	W15L	4940	2240	23	160	18.9	479	52.6	1335
LL: 231002390_ LA: 231002391_ IN: 231002392_ BLA03: 231002531	650/65R38	157/160	D/A8	DW20B	9100	4125	23	160	25.4	645	71.3	1811
LL: 231002393_ LA: 231002394_ IN: 231002395_ BLA03: 231002528	540/65R28	142/145	D/A8	W18L	5840	2650	23	160	21.7	550	55.6	1413
LL: 231002396_ LA: 231002397_ IN: 231002398_ BLA03: 231002529	540/65R30	150/153	D/A8	W18L	7400	3350	35	240	21.7	550	57.6	1464
LL: 231002402_ LA: 231002403_ IN: 231002404_ BLA03: 231002522	440/65R24	128/125	D/A8	W14L	3960	1800	23	160	17.4	441	46.5	1182
LL: 231002399_ LA: 231002400_ IN: 231002401_ BLA03: 231002532	650/65R42	158/161	D/A8	DW20B	9350	4250	23	160	25.4	645	75.3	1913
LL: 231002405_ LA: 231002406_ IN: 231002407_ BLA03: 231002527	540/65R24	140/143	D/A8	W18L	5520	2500	23	160	21.7	550	51.7	1312
LL: 231002408_ LA: 231002409_ IN: 231002410_ BLA03: 231002530	540/65R34	145/148	D/A8	W18L	6400	2900	23	160	21.7	550	61.7	1566

LR451-Features & Benefits



★ **More Traction :**
Wider lugs with the widest tread improve the traction performance.



★ **Lower Wear :**
Big lugs on the center ,improve tire contact areas, reduce the tread crown wear.



460/70R24 IND R-4



★ **Bead Protect :**
Adopt special wear-resistance rubber to protect the bead, keep away from the earlier wear .

★ **Tread Protect**
Protective bridge around the Centerline, improve tear performance of the tread crown.

LINGLONG LR451

New products of LR451

SAP号	Size	Load Index	Speed Symbols	Standard Rim	Load		Inflation		Overall Width		Overall Diameter	
					lbs	kg	psi	kPa	in	mm	in	mm
LL: 231002414_ LA: 231002415_ IN: 231002416_ BLA04: 231002494_	460/70R24 IND	152/152	A8/B	DW14L	7850	3550	46	320	17.90	455	49.40	1254
LL: 231002411_ LA: 231002412_ IN: 231002413_ BLA04: 231002495_	460/70R24 IND	159/159	A8/B	DW14L	9650	4375	58	400	17.90	455	49.40	1254